



Product Service

EMC - TEST REPORT

Report Number	: 65.760.14.028.01	Date of Issue:	08 August 2014
Model No.	: FJ-SWqxxxxyyyzn ("q"=126 or 726, 126 means type A PCB and horizontal enclosure used, 726 means type B PCB and vertical enclosure used; "xxx"=050-240 indicates rated output voltage range 5.0VDC-24.0VDC; "yyy"=0100-2500 indicates rated output current range 100mA-2500 mA; "z"= U or D, U indicates output with USB connector, D indicates output with output cable; "n"= S, N, S means fixed Australia plug provided, N means detachable plug provided)		
Product Type	: Switching Adaptor		
Applicant	: Shenzhen Fujia Appliance Co., Ltd.		
Address	: Bldg B1, Xujingchang Technology Ind. Park, Haoye Road, Xinhe Village, Fuyong Town, Bao'an District, 518103 Shenzhen, Guangdong, PEOPLE'S REPUBLIC OF CHINA		
Production Facility	: Shenzhen Fujia Appliance Co., Ltd.		
Address	: Bldg B1, Xujingchang Technology Ind. Park, Haoye Road, Xinhe Village, Fuyong Town, Bao'an District, 518103 Shenzhen, Guangdong, PEOPLE'S REPUBLIC OF CHINA		
Test Result	: ☒ Positive ☐ Negative		
Total pages including Appendices	: 56		

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.



1 Table of Contents

1	Table of Contents.....	2
2	Details about the Test Laboratory.....	3
3	Description of the Equipment Under Test.....	4
4	Summary of Test Standards.....	5
5	Summary of Test Results.....	6
6	General Remarks.....	7
7	Emission Test Results.....	8
	7.1 Conducted Emission Test.....	8
	7.2 Power Disturbance Test.....	25
8	Appendix A.....	42
	Product Information Form(s)	
9	Appendix B.....	43
	Photographs of EUT	



2 Details about the Test Laboratory

Details about the Test Laboratory

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12&13, Zhiheng Wisdomland Business Park
Nantou Checkpoint Road 2, Nanshan District,
518052 Shenzhen, CHINA

Telephone: 86 755 8828 6998

Fax: 86 755 8828 5299

Company name: EST Technology Co., Ltd.
Santun Management Zone (Guantai Road)
Houjie District, Dongguan
Guangdong
P.R.China

Telephone: 86 769 8308 1888

Fax: 86 769 8308 1878

3 Description of the Equipment Under Test

Description of the Equipment Under Test

Product: Switching Adaptor

Model no.: FJ-SW1260502500DS, FJ-SW1262400500DS,
FJ-SW7260502500DS, FJ-SW7262400500DS

Serial number: NIL

Trademark: NIL

Rated Input: 100-240VAC, 50/60Hz, 0.4A Max.

Rated Output: 5VDC, 2500mA[FJ-SW1260502500DS & FJ-SW7260502500DS],
24VDC, 500mA[FJ-SW1262400500DS & FJ-SW7262400500DS],

Description of the EUT: NIL

4 Summary of Test Standards

Test Standards	
AS/NZS CISPR 13:2012	Sound and television broadcast receivers and associated equipment – Radio disturbance characteristics – Limits and methods of measurement

5 Summary of Test Results

Emission Tests				
AS/NZS CISPR 13:2012				
Test Condition	Pages	Test Result		
		Pass	Fail	N/A
Conducted Emission on AC 150kHz to 30MHz	8	☒	☐	☐
Power Disturbance on AC 30MHz to 300MHz	25	☒	☐	☐

6 General Remarks

Remarks

All models for series FJ-SW126xxxxxyyyzn and series FJ-SW726xxxxxyyyzn have same schematic and PCB layout respectively, see Appendix A for the detailed model difference, therefore EMC full test were applied on FJ-SW1260502500DS, FJ-SW1262400500DS, FJ-SW7260502500DS and FJ-SW7262400500DS, other models are deemed to fulfill relevant EMC requirement without further testing.

SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - Not Performed

The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: 20 May 2014

Testing Start Date: 20 May 2014

Testing End Date: 26 June 2014

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch -

Reviewed by:



Phoebe Hu
EMC Project Manager



Prepared by:




Allen Yang
EMC Project Engineer

7 Emission Test Results

7.1 Conducted Emission Test 150kHz – 30MHz


EUT : M/N: FJ-SW1260502500DS(with line filter L1)
 Operation Condition : Full Load
 Test Specification : Power Line; Live
 Comment : AC 240V/50Hz

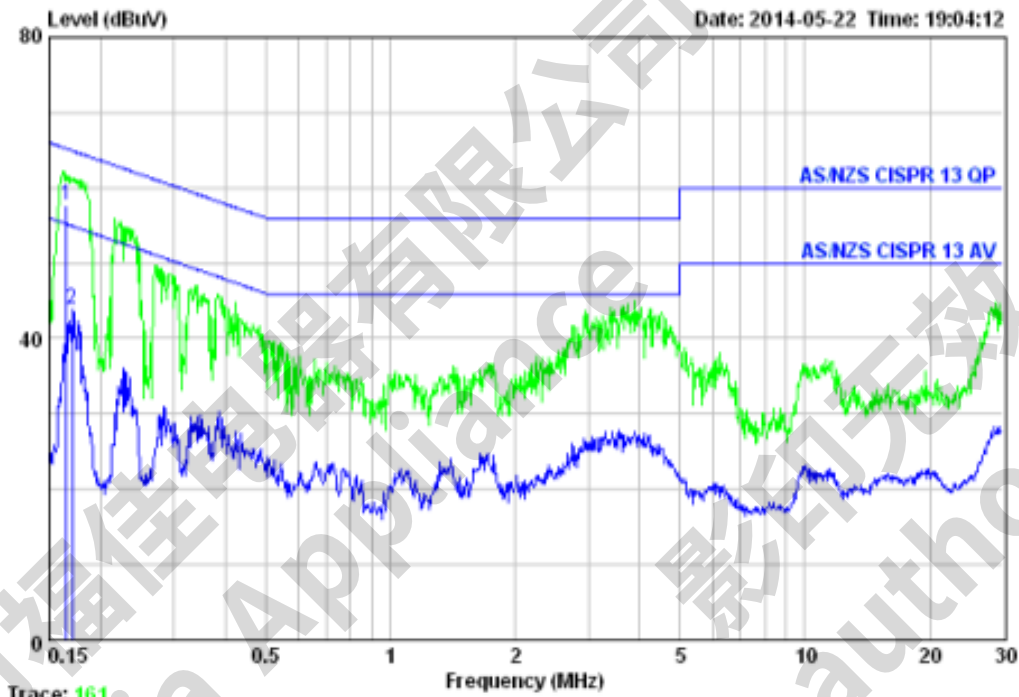

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.16	9.61	9.81	38.38	57.80	65.22	7.42	QP
2	0.17	9.61	9.81	24.58	44.00	54.94	10.94	Average

Conducted Emission Test 150kHz – 30MHz


EUT : M/N: FJ-SW1260502500DS(with line filter L1)
 Operation Condition : Full Load
 Test Specification : Power Line, Neutral
 Comment : AC 240V/50Hz

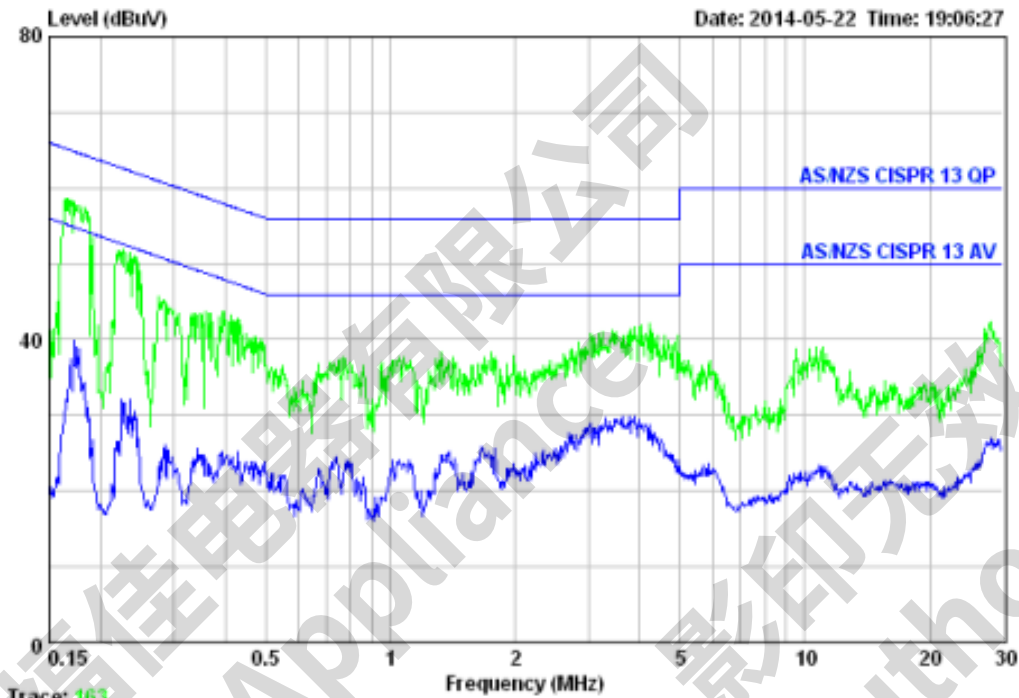

Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
----------------	------------------------	-----------------------	-------------------	-------------------------------	-------------------	----------------	--------

Conducted Emission Test 150kHz – 30MHz


EUT : M/N: FJ-SW1260502500DS(with common mode choke LF1 and MOV1)
 Operation Condition : Full Load
 Test Specification : Power Line; Live
 Comment : AC 240V/50Hz

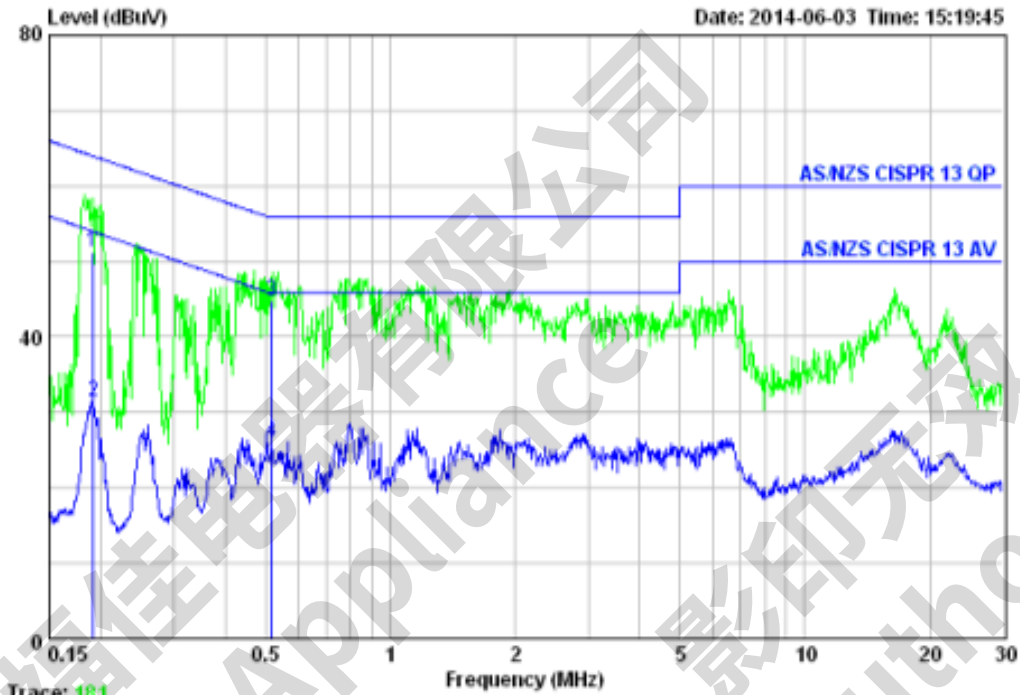

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.19	9.61	9.80	31.89	51.30	63.99	12.69	QP
2	0.19	9.61	9.80	12.12	31.53	53.98	22.45	Average
3	0.52	9.61	9.81	25.38	44.80	56.00	11.20	QP
4	0.52	9.61	9.81	6.68	26.10	46.00	19.90	Average

Conducted Emission Test 150kHz – 30MHz


EUT : M/N: FJ-SW1260502500DS(with common mode choke LF1 and MOV1)
 Operation Condition : Full Load
 Test Specification : Power Line, Neutral
 Comment : AC 240V/50Hz

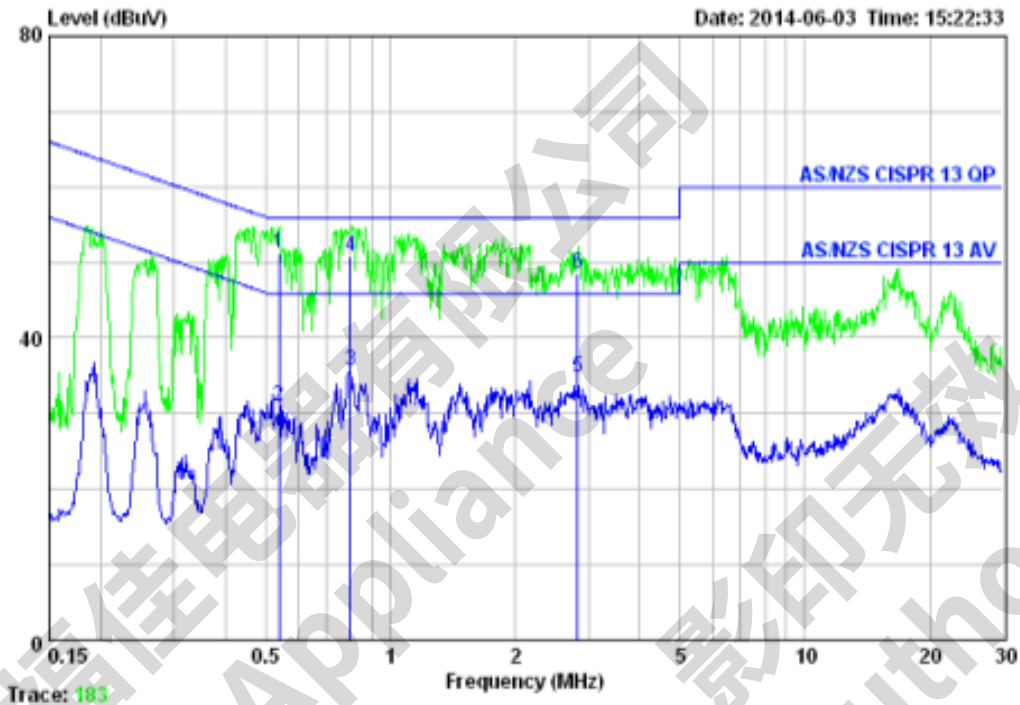

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.54	9.60	9.82	31.88	51.30	56.00	4.70	QP
2	0.54	9.60	9.82	11.51	30.93	46.00	15.07	Average
3	0.80	9.62	9.81	16.13	35.56	46.00	10.44	Average
4	0.80	9.62	9.81	31.47	50.90	56.00	5.10	QP
5	2.82	9.63	9.83	15.21	34.67	46.00	11.33	Average
6	2.82	9.63	9.83	29.14	48.60	56.00	7.40	QP

Conducted Emission Test 150kHz – 30MHz


EUT : M/N: FJ-SW1262400500DS(with line filter L1)
 Operation Condition : Full Load
 Test Specification : Power Line; Live
 Comment : AC 240V/50Hz

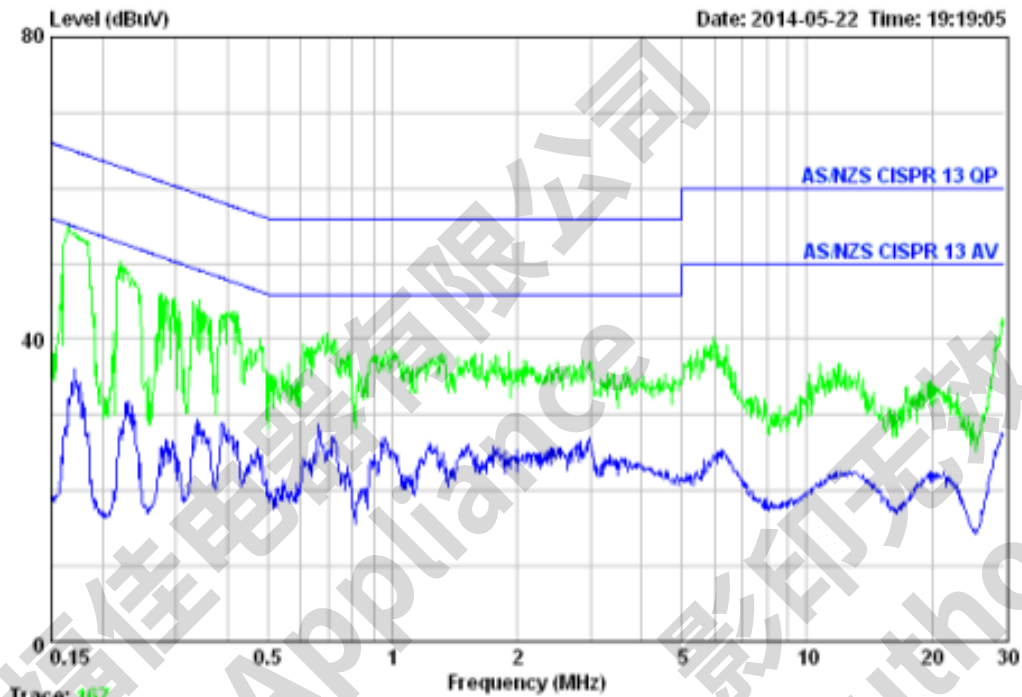

Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark

Conducted Emission Test 150kHz – 30MHz


EUT : M/N: FJ-SW1262400500DS(with line filter L1)
 Operation Condition : Full Load
 Test Specification : Power Line, Neutral
 Comment : AC 240V/50Hz

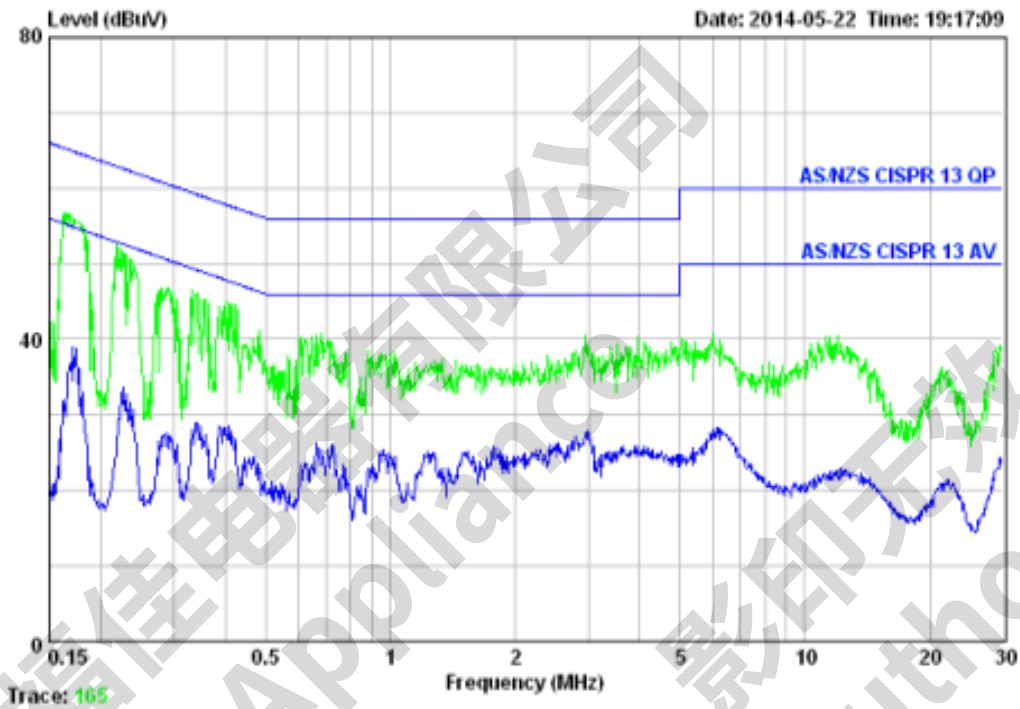

Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
----------------	------------------------	-----------------------	-------------------	-------------------------------	-------------------	----------------	--------

Conducted Emission Test 150kHz – 30MHz


EUT : M/N: FJ-SW1262400500DS(with common mode choke LF1 and MOV1)
 Operation Condition : Full Load
 Test Specification : Power Line; Live
 Comment : AC 240V/50Hz

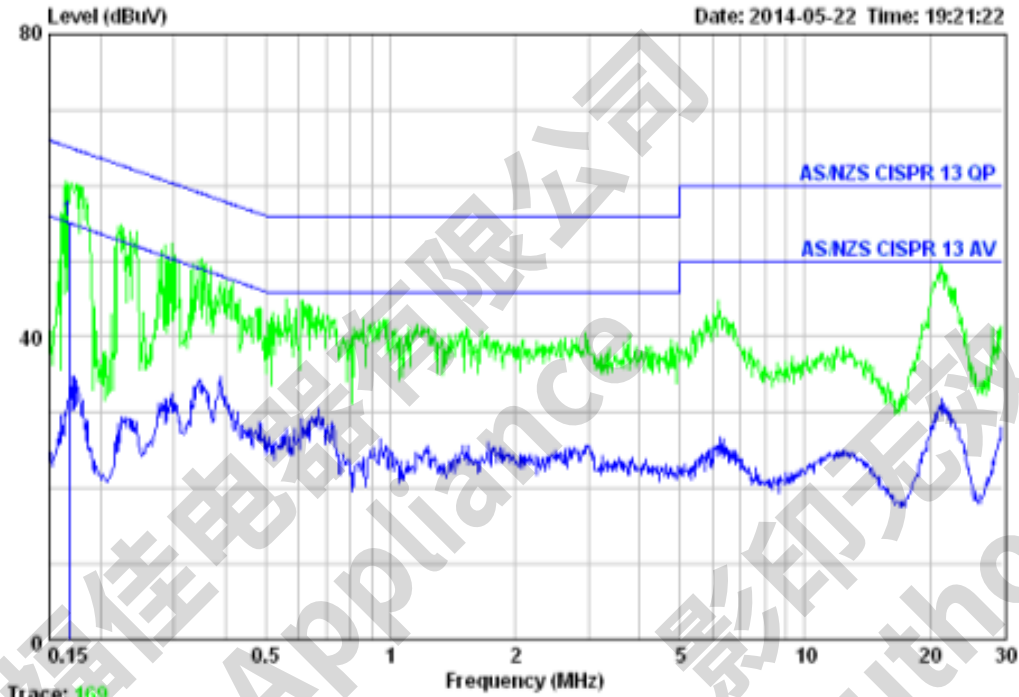

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.17	9.61	9.81	35.88	55.30	65.08	9.78	QP

Conducted Emission Test 150kHz – 30MHz


EUT : M/N: FJ-SW1262400500DS(with common mode choke LF1 and MOV1)
 Operation Condition : Full Load
 Test Specification : Power Line, Neutral
 Comment : AC 240V/50Hz

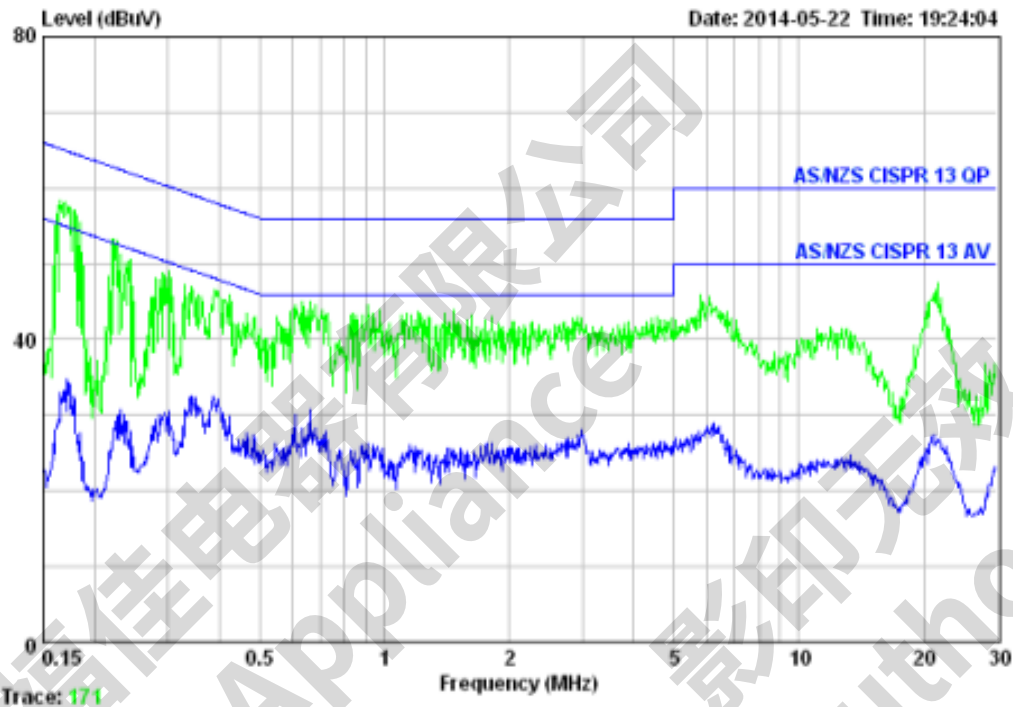

Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
----------------	------------------------	-----------------------	-------------------	-------------------------------	-------------------	----------------	--------

Conducted Emission Test 150kHz – 30MHz


EUT : M/N: FJ-SW7260502500DS(with line filter L1)
 Operation Condition : Full Load
 Test Specification : Power Line; Live
 Comment : AC 240V/50Hz

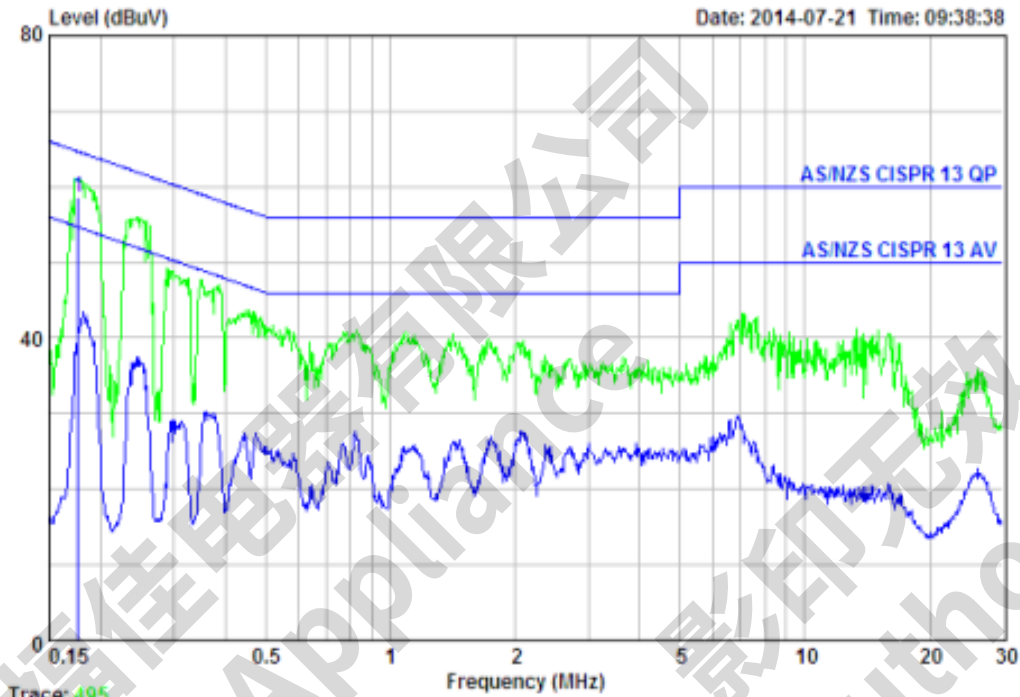

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.15	9.61	9.80	39.09	58.50	64.67	6.17	QP

Conducted Emission Test 150kHz – 30MHz


EUT : M/N: FJ-SW7260502500DS(with line filter L1)
 Operation Condition : Full Load
 Test Specification : Power Line, Neutral
 Comment : AC 240V/50Hz

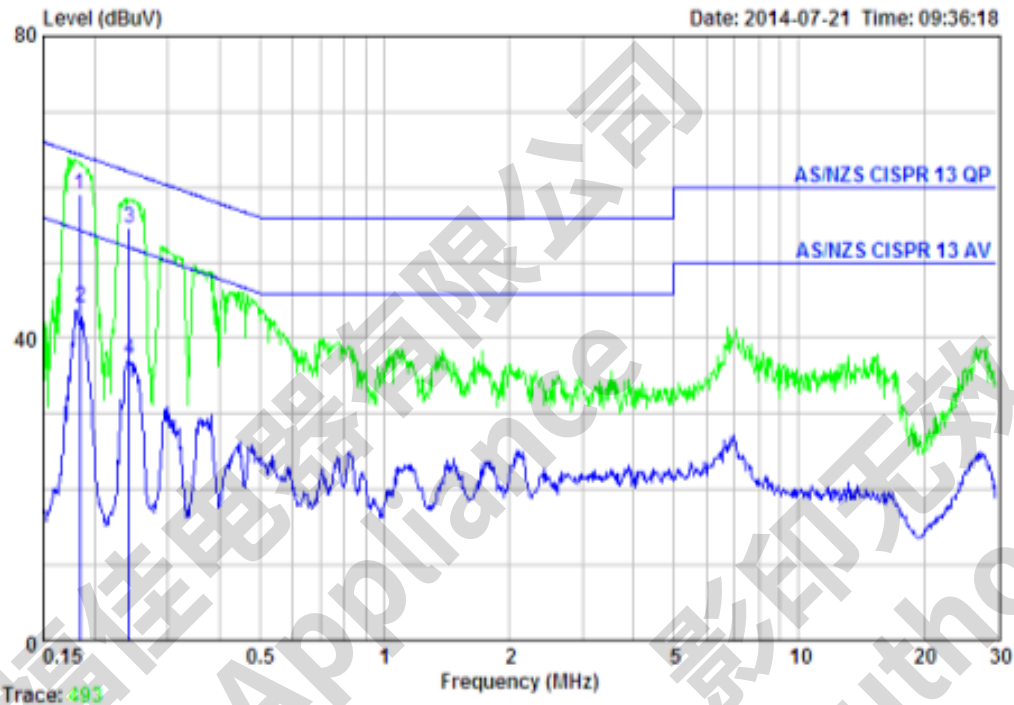

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.18	9.56	9.80	39.64	59.00	64.30	5.30	QP
2	0.18	9.56	9.80	24.73	44.09	54.28	10.19	Average
3	0.24	9.60	9.82	35.18	54.60	62.04	7.44	QP
4	0.24	9.60	9.82	17.81	37.23	52.04	14.81	Average

Conducted Emission Test 150kHz – 30MHz


EUT : M/N: FJ-SW7260502500DS(with common mode choke LF1 and MOV1)
 Operation Condition : Full Load
 Test Specification : Power Line; Live
 Comment : AC 240V/50Hz

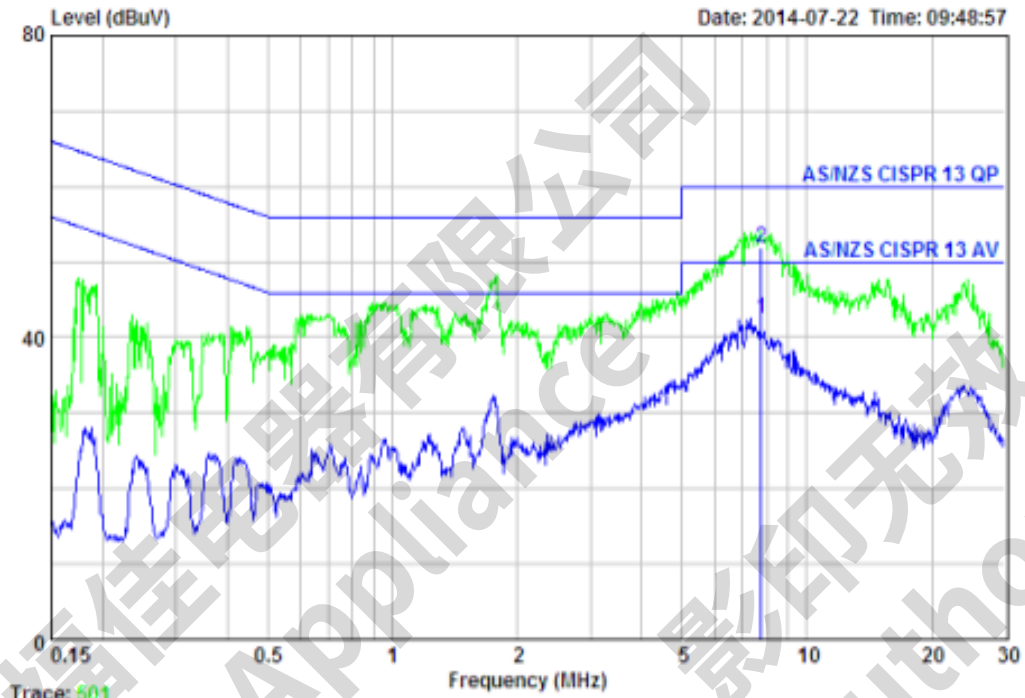

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7.74	9.66	9.87	23.07	42.60	50.00	7.40	Average
2	7.74	9.66	9.87	32.97	51.90	60.00	8.10	QP

Conducted Emission Test 150kHz – 30MHz


EUT : M/N: FJ-SW7260502500DS(with common mode choke LF1 and MOV1)
 Operation Condition : Full Load
 Test Specification : Power Line, Neutral
 Comment : AC 240V/50Hz

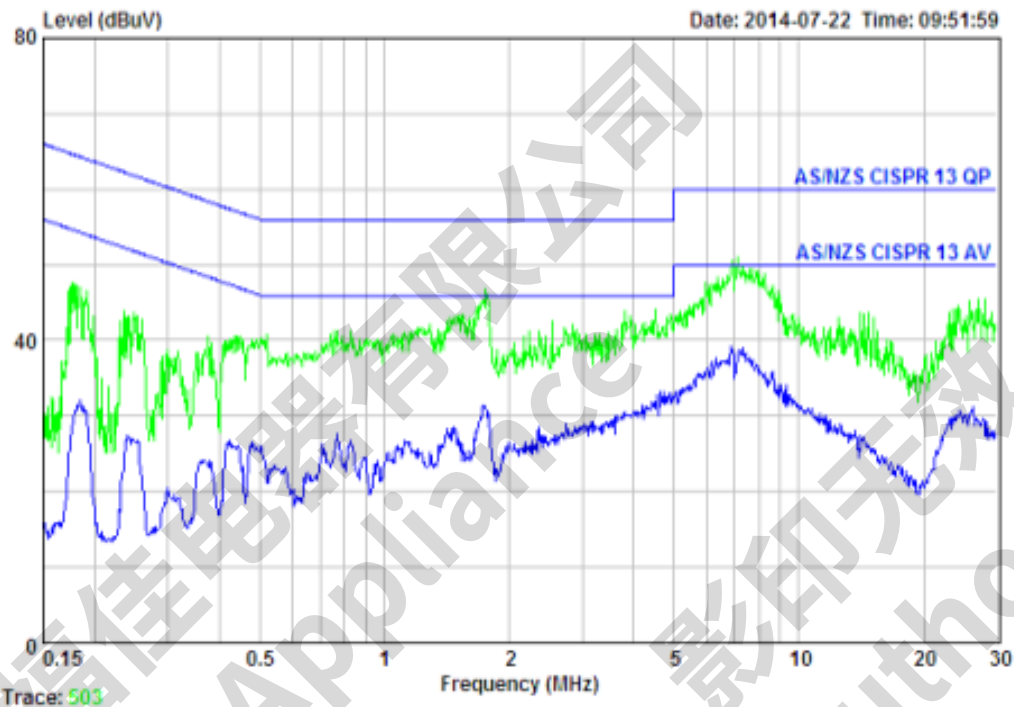

Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
----------------	------------------------	-----------------------	-------------------	-------------------------------	-------------------	----------------	--------

Conducted Emission Test 150kHz – 30MHz


EUT : M/N: FJ-SW7262400500DS(with line filter L1)
 Operation Condition : Full Load
 Test Specification : Power Line; Live
 Comment : AC 240V/50Hz

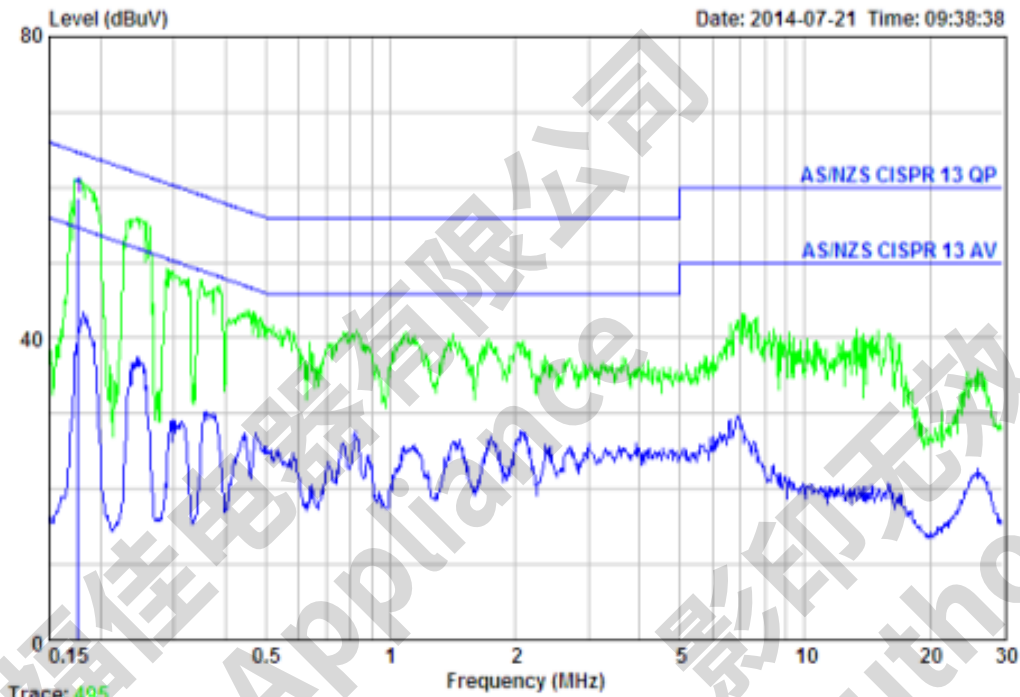

Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.18	9.61	39.09	58.50	64.67	6.17	QP

Conducted Emission Test 150kHz – 30MHz


EUT : M/N: FJ-SW7262400500DS(with line filter L1)
 Operation Condition : Full Load
 Test Specification : Power Line, Neutral
 Comment : AC 240V/50Hz

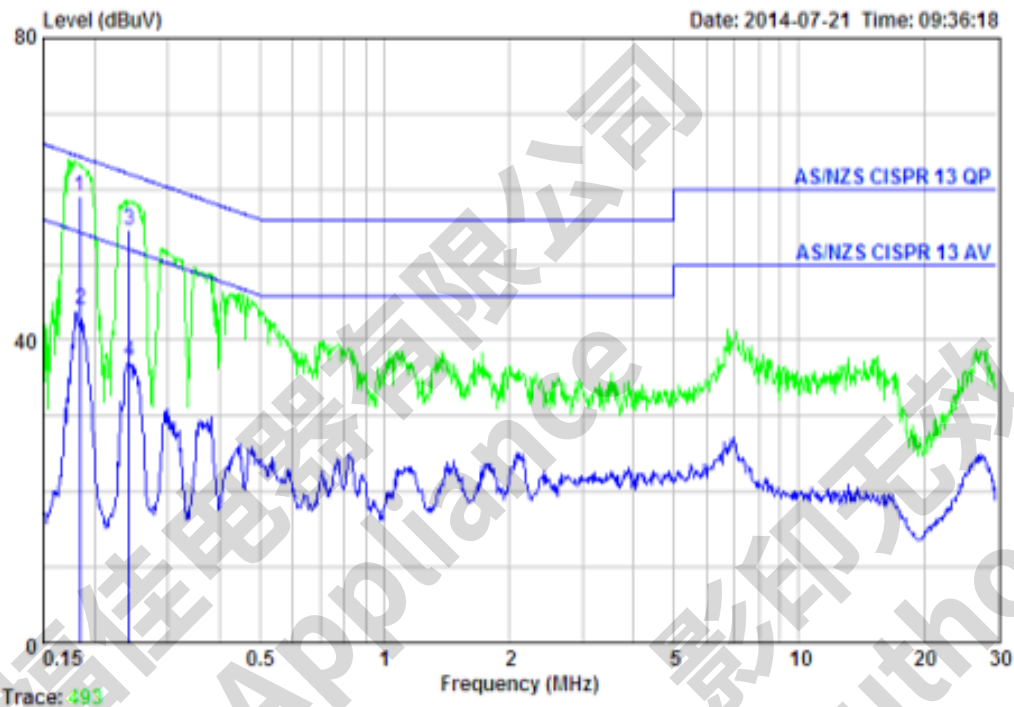

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.18	9.56	9.80	39.64	59.00	64.30	5.30	QP
2	0.18	9.56	9.80	24.73	44.09	54.28	10.19	Average
3	0.24	9.60	9.82	35.18	54.60	62.04	7.44	QP
4	0.24	9.60	9.82	17.81	37.23	52.04	14.81	Average

Conducted Emission Test 150kHz – 30MHz


EUT : M/N: FJ-SW7262400500DS(with common mode choke LF1 and MOV1)
 Operation Condition : Full Load
 Test Specification : Power Line; Live
 Comment : AC 240V/50Hz

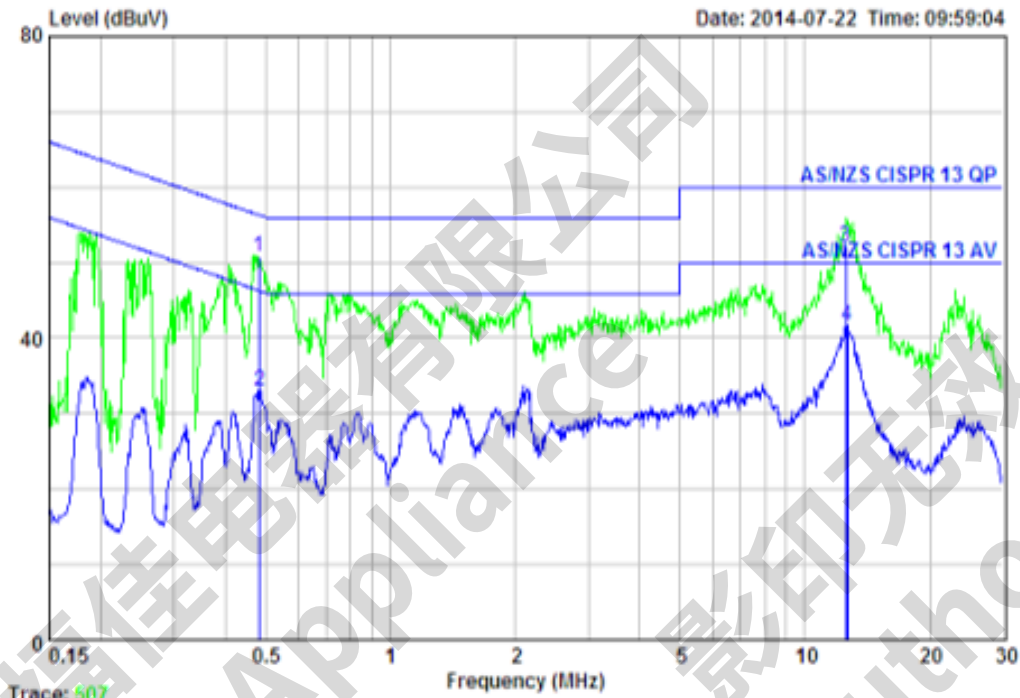

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.48	9.61	9.81	31.28	50.70	56.33	5.63	QP
2	0.48	9.61	9.81	13.45	32.87	46.27	13.40	Average
3	12.57	9.67	9.91	32.52	52.10	60.00	7.90	QP
4	12.65	9.67	9.92	22.15	41.74	50.00	8.26	Average

Conducted Emission Test 150kHz – 30MHz

EUT : M/N: FJ-SW7262400500DS(with common mode choke LF1 and MOV1)
 Operation Condition : Full Load
 Test Specification : Power Line, Neutral
 Comment : AC 240V/50Hz

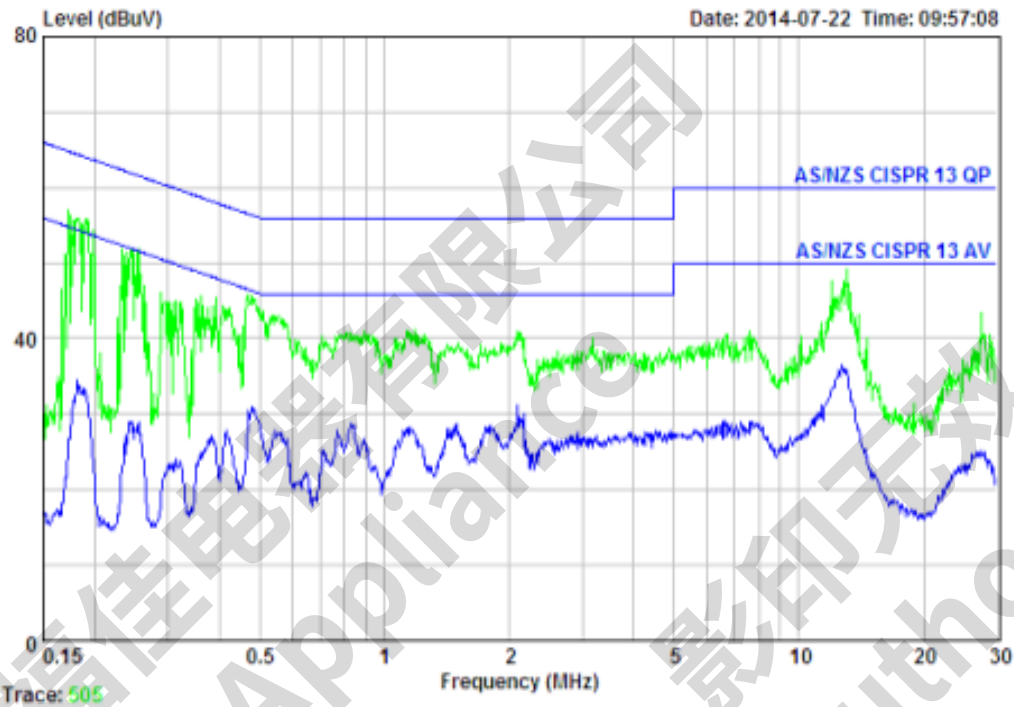

Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
----------------	------------------------	-----------------------	-------------------	-------------------------------	-------------------	----------------	--------



Product Service


Test Equipment List

Conducted Emission Test

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESHS30	832354	2015-03-16
Artificial Mains Network	Rohde & Schwarz	ENV216	101260	2015-03-16
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	101100	2014-08-25


7.2 Power Disturbance Test 30MHz – 300MHz

EUT : M/N: FJ-SW1260502500DS(with line filter L1)
 Operation Condition : Full Load
 Test Specification : AC Mains
 Comment : AC 240V/50Hz

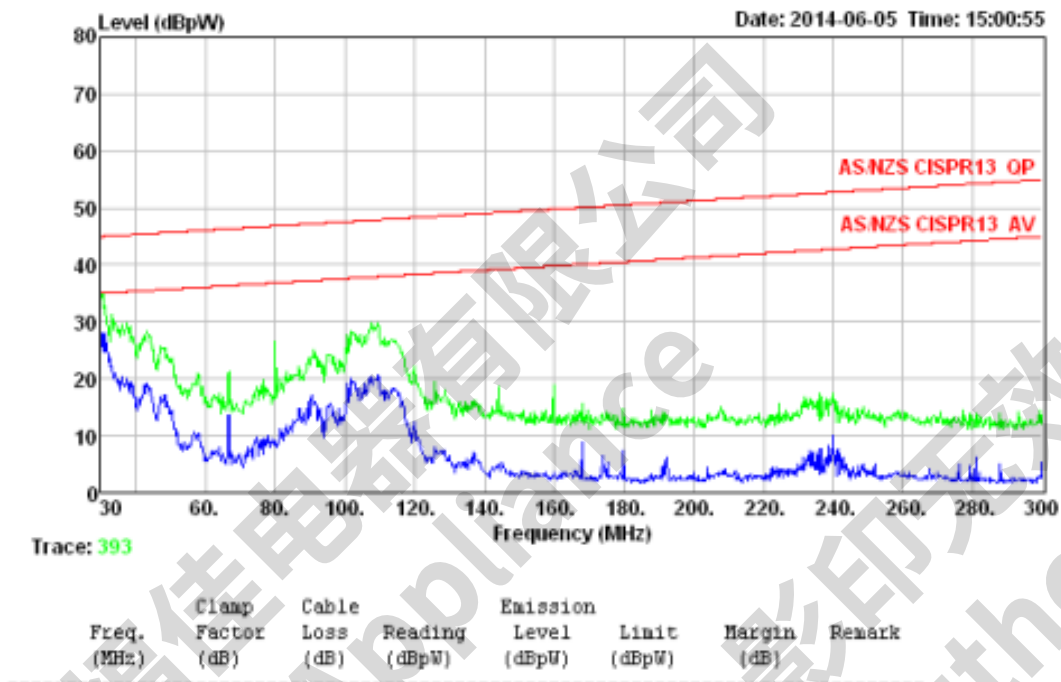

Power Disturbance Test 30MHz – 300MHz


EUT : M/N: FJ-SW1260502500DS(with line filter L1)
 Operation Condition : Full Load
 Test Specification : DC Line
 Comment : AC 240V/50Hz

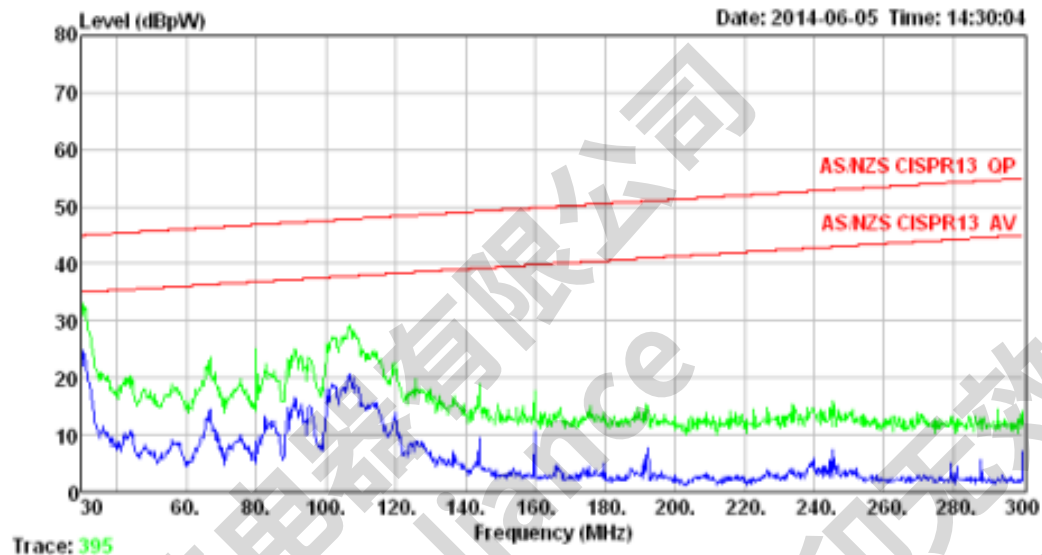

Freq. (MHz)	Clamp Factor (dB)	Cable Loss (dB)	Reading (dBpW)	Emission Level (dBpW)	Limit (dBpW)	Margin (dB)	Remark

Power Disturbance Test 30MHz – 300MHz


EUT : M/N: FJ-SW1260502500DS(with common mode choke LF1 and MOV1)
 Operation Condition : Full Load
 Test Specification : AC Mains
 Comment : AC 240V/50Hz

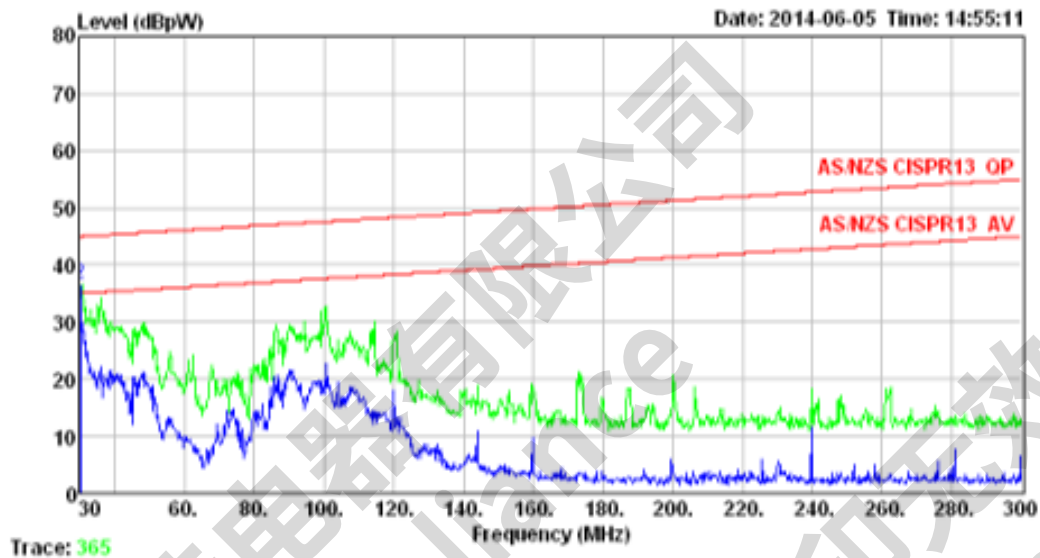

	Freq. (MHz)	Clamp Factor (dB)	Cable Loss (dB)	Reading (dBpW)	Emission Level (dBpW)	Limit (dBpW)	Margin (dB)	Remark
1	30.00	20.86	6.74	3.53	31.13	35.00	3.87	Average
2	30.00	20.86	6.74	9.00	36.60	44.99	8.39	QP

Power Disturbance Test 30MHz – 300MHz


EUT : M/N: FJ-SW1260502500DS(with common mode choke LF1 and MOV1)
 Operation Condition : Full Load
 Test Specification : DC Line
 Comment : AC 240V/50Hz

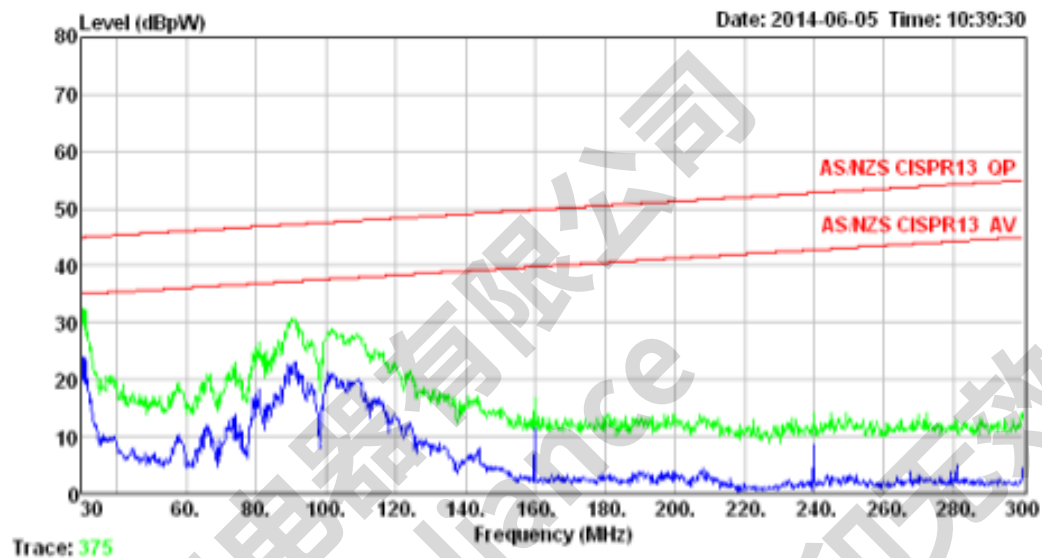

Freq. (MHz)	Clamp Factor (dB)	Cable Loss (dB)	Reading (dBpW)	Emission Level (dBpW)	Limit (dBpW)	Margin (dB)	Remark

Power Disturbance Test 30MHz – 300MHz


EUT : M/N: FJ-SW1262400500DS(with line filter L1)
 Operation Condition : Full Load
 Test Specification : AC Mains
 Comment : AC 240V/50Hz

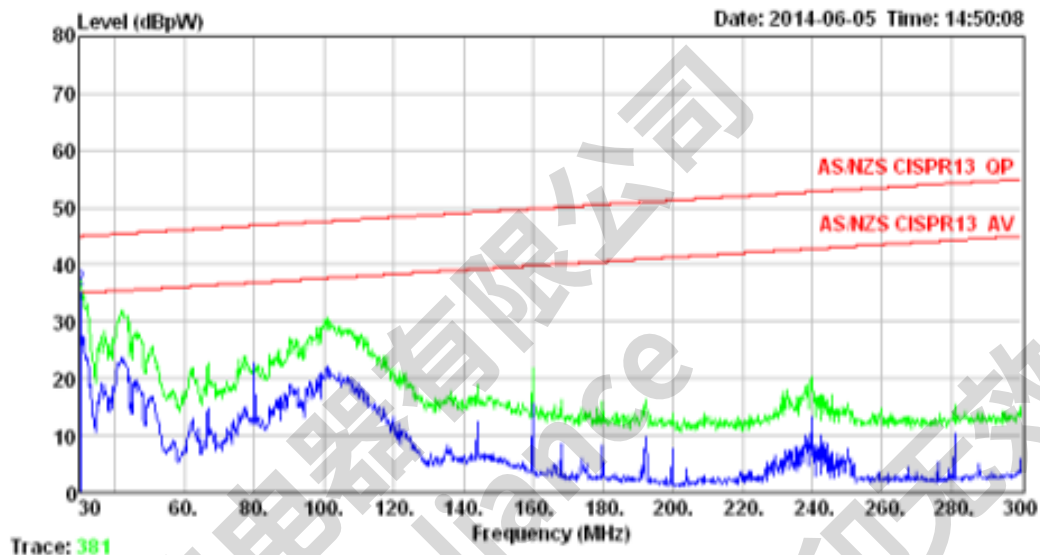

	Freq. (MHz)	Clamp Factor (dB)	Cable Loss (dB)	Reading (dBpW)	Emission Level (dBpW)	Limit (dBpW)	Margin (dB)	Remark
1	30.00	20.86	6.74	2.55	30.15	35.00	4.85	Average
2	30.00	20.86	6.74	7.70	35.30	44.99	9.69	QP

Power Disturbance Test 30MHz – 300MHz


EUT : M/N: FJ-SW1262400500DS(with line filter L1)
 Operation Condition : Full Load
 Test Specification : DC Line
 Comment : AC 240V/50Hz

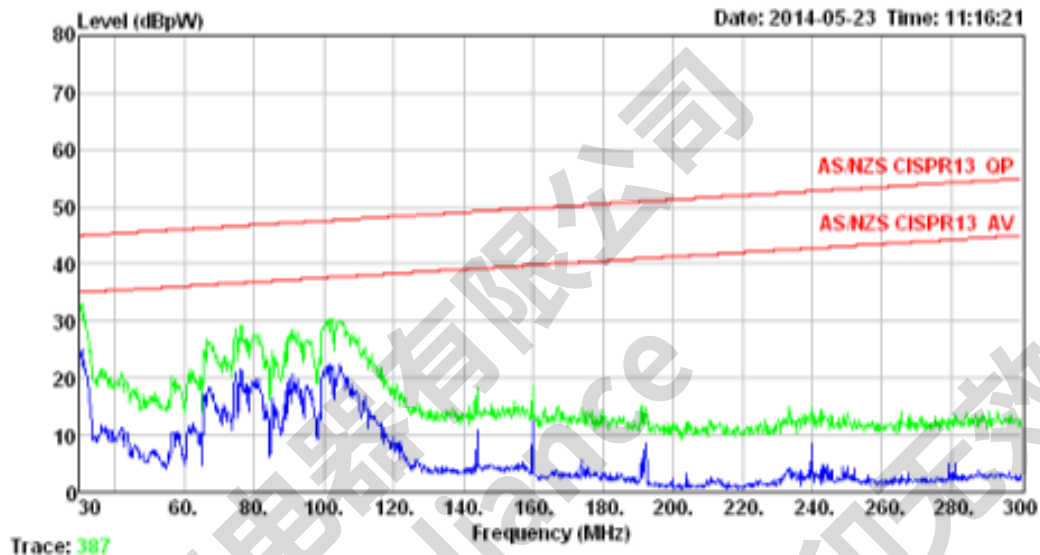

Freq. (MHz)	Clamp Factor (dB)	Cable Loss (dB)	Reading (dBpW)	Emission Level (dBpW)	Limit (dBpW)	Margin (dB)	Remark

Power Disturbance Test 30MHz – 300MHz


EUT : M/N: FJ-SW1262400500DS(with common mode choke LF1 and MOV1)
 Operation Condition : Full Load
 Test Specification : AC Mains
 Comment : AC 240V/50Hz

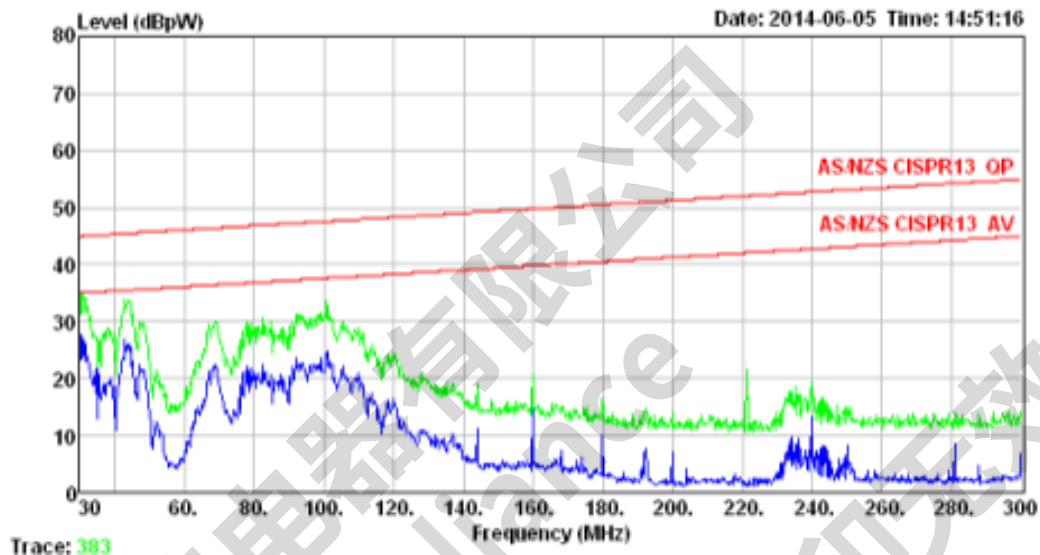

Freq. (MHz)	Clamp Factor (dB)	Cable Loss (dB)	Reading (dBpW)	Emission Level (dBpW)	Limit (dBpW)	Margin (dB)	Remark

Power Disturbance Test 30MHz – 300MHz


EUT : M/N: FJ-SW1262400500DS(with common mode choke LF1 and MOV1)
 Operation Condition : Full Load
 Test Specification : DC Line
 Comment : AC 240V/50Hz

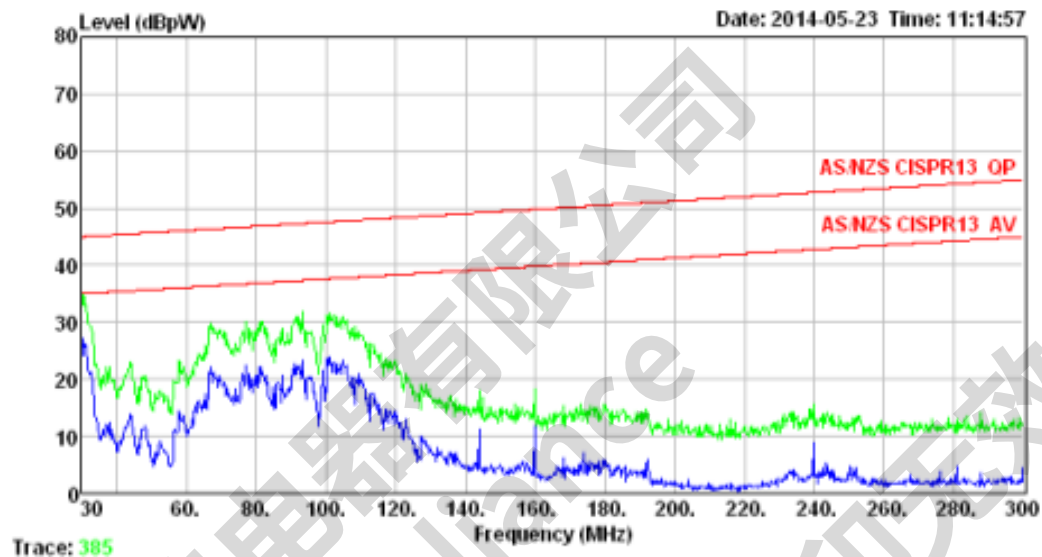

Freq. (MHz)	Clamp Factor (dB)	Cable Loss (dB)	Reading (dBpW)	Emission Level (dBpW)	Limit (dBpW)	Margin (dB)	Remark

Power Disturbance Test 30MHz – 300MHz


EUT : M/N: FJ-SW7260502500DS(with line filter L1)
 Operation Condition : Full Load
 Test Specification : AC Mains
 Comment : AC 240V/50Hz

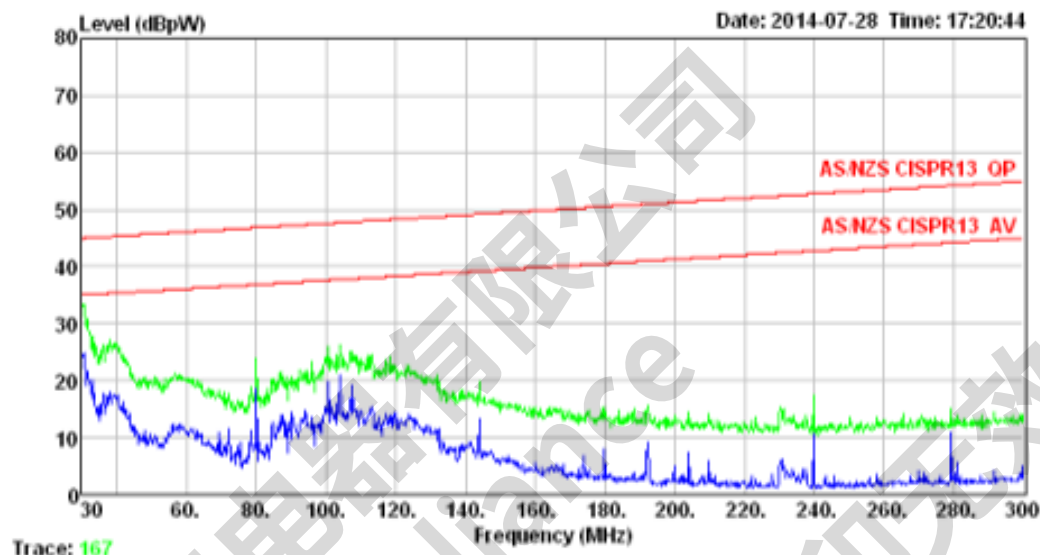

Freq. (MHz)	Clamp Factor (dB)	Cable Loss (dB)	Reading (dBpW)	Emission Level (dBpW)	Limit (dBpW)	Margin (dB)	Remark

Power Disturbance Test 30MHz – 300MHz


EUT : M/N: FJ-SW7260502500DS(with line filter L1)
 Operation Condition : Full Load
 Test Specification : DC Line
 Comment : AC 240V/50Hz

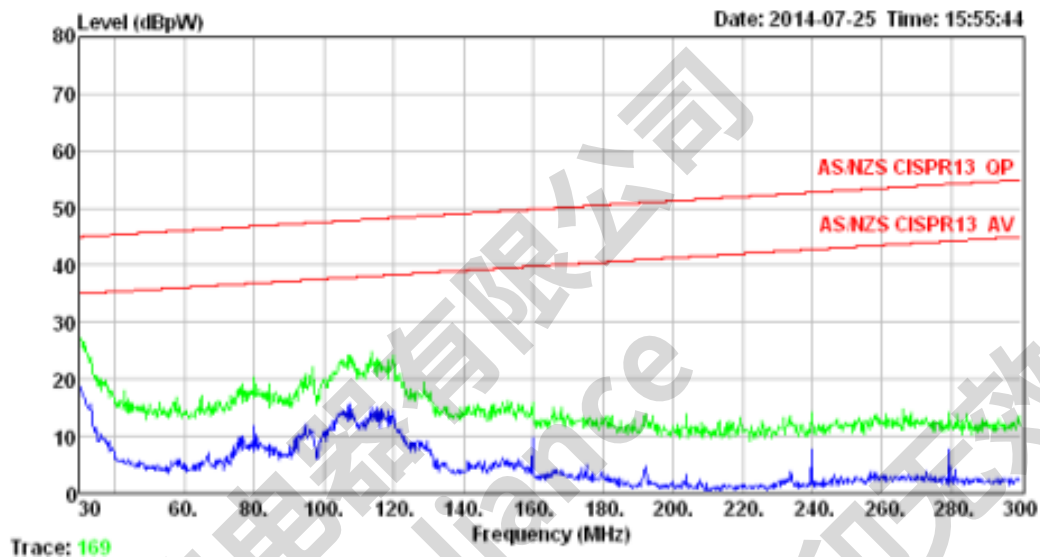

Freq. (MHz)	Clamp Factor (dB)	Cable Loss (dB)	Reading (dBpW)	Emission Level (dBpW)	Limit (dBpW)	Margin (dB)	Remark

Power Disturbance Test 30MHz – 300MHz


EUT : M/N: FJ-SW7260502500DS(with common mode choke LF1 and MOV1)
 Operation Condition : Full Load
 Test Specification : AC Mains
 Comment : AC 240V/50Hz

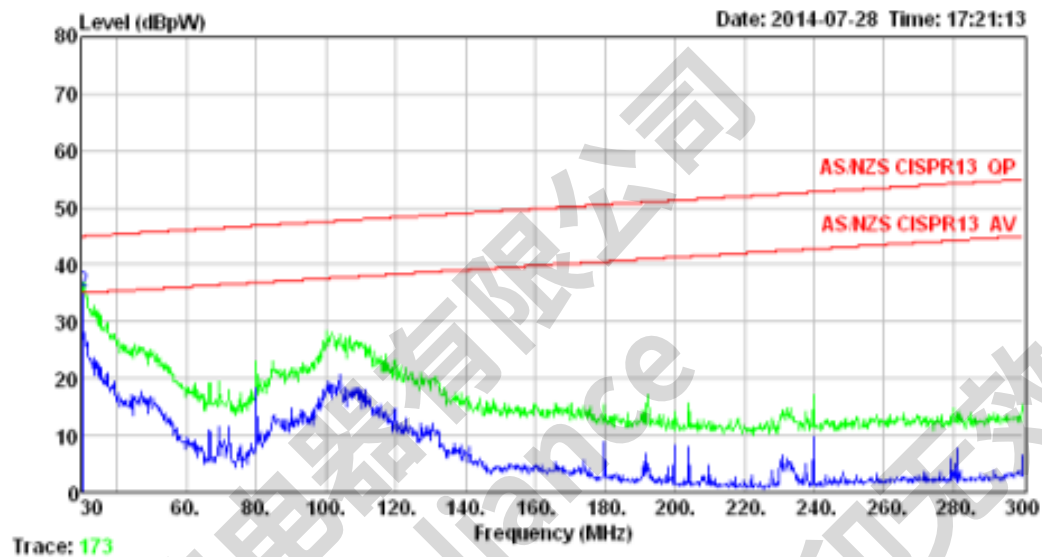

	Freq. (MHz)	Clamp Factor (dB)	Cable Loss (dB)	Reading (dBpW)	Emission Level (dBpW)	Limit (dBpW)	Margin (dB)	Remark
1	30.27	20.83	6.74	0.70	28.27	35.01	6.74	Average
2	30.27	20.83	6.74	7.63	35.20	45.00	9.80	QP

Power Disturbance Test 30MHz – 300MHz


EUT : M/N: FJ-SW7260502500DS(with common mode choke LF1 and MOV1)
 Operation Condition : Full Load
 Test Specification : DC Line
 Comment : AC 240V/50Hz

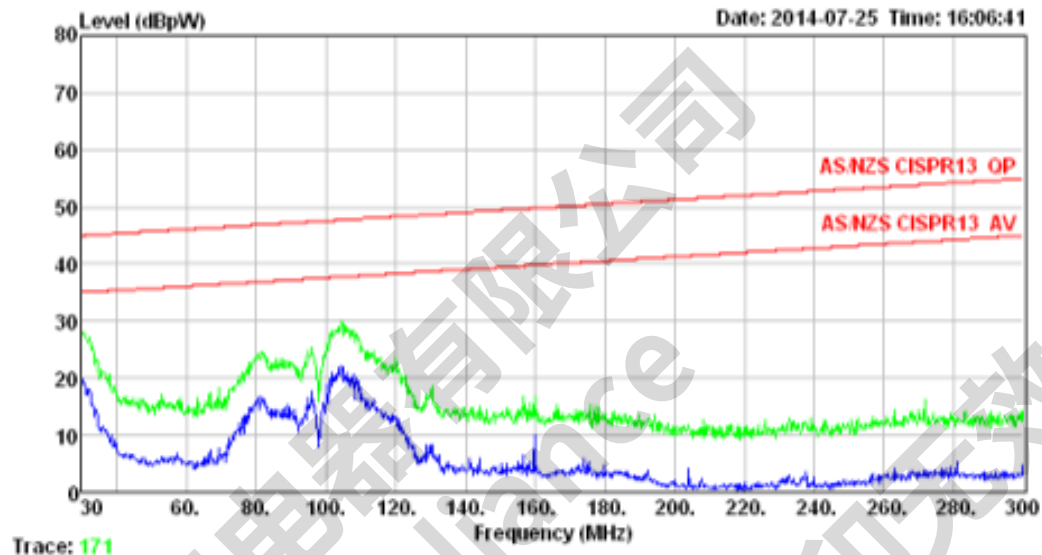

Freq. (MHz)	Clamp Factor (dB)	Cable Loss (dB)	Reading (dBpW)	Emission Level (dBpW)	Limit (dBpW)	Margin (dB)	Remark

Power Disturbance Test 30MHz – 300MHz


EUT : M/N: FJ-SW7262400500DS(with line filter L1)
 Operation Condition : Full Load
 Test Specification : AC Mains
 Comment : AC 240V/50Hz

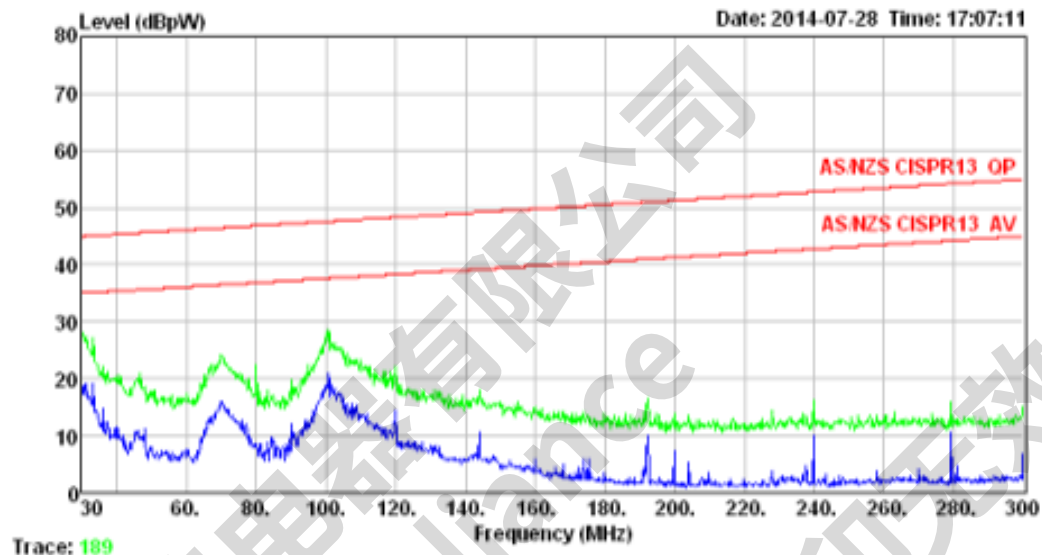

Freq. (MHz)	Clamp Factor (dB)	Cable Loss (dB)	Reading (dBpW)	Emission Level (dBpW)	Limit (dBpW)	Margin (dB)	Remark
----------------	-------------------------	-----------------------	-------------------	-----------------------------	-----------------	----------------	--------


Power Disturbance Test 30MHz – 300MHz

EUT : M/N: FJ-SW7262400500DS(with line filter L1)
 Operation Condition : Full Load
 Test Specification : DC Line
 Comment : AC 240V/50Hz

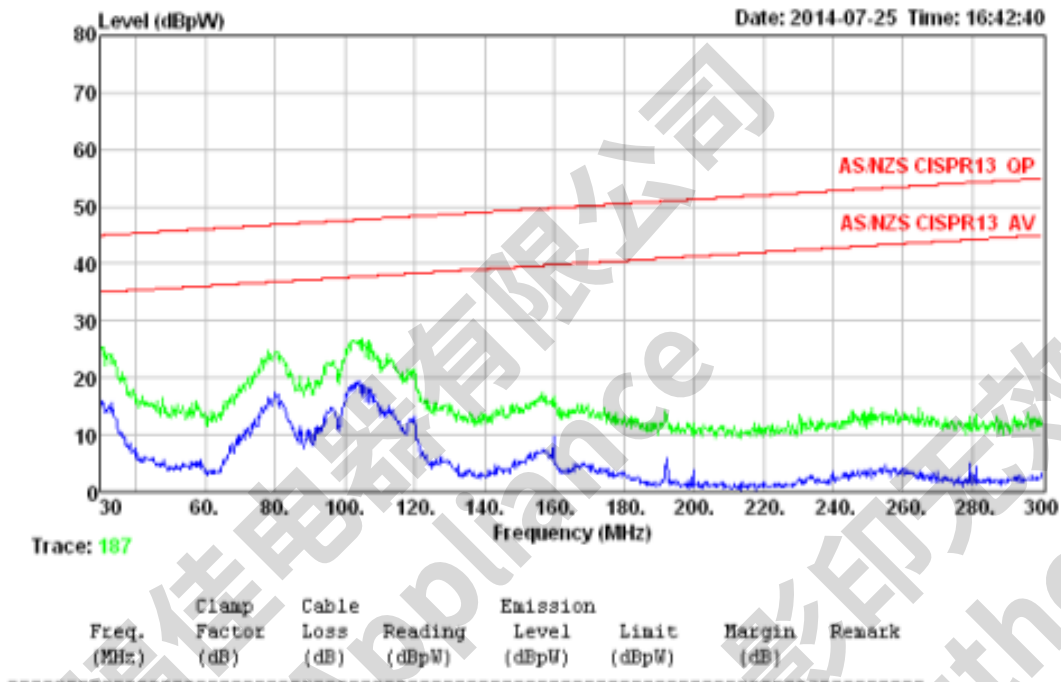

Power Disturbance Test 30MHz – 300MHz


EUT : M/N: FJ-SW7262400500DS(with common mode choke LF1 and MOV1)
 Operation Condition : Full Load
 Test Specification : AC Mains
 Comment : AC 240V/50Hz

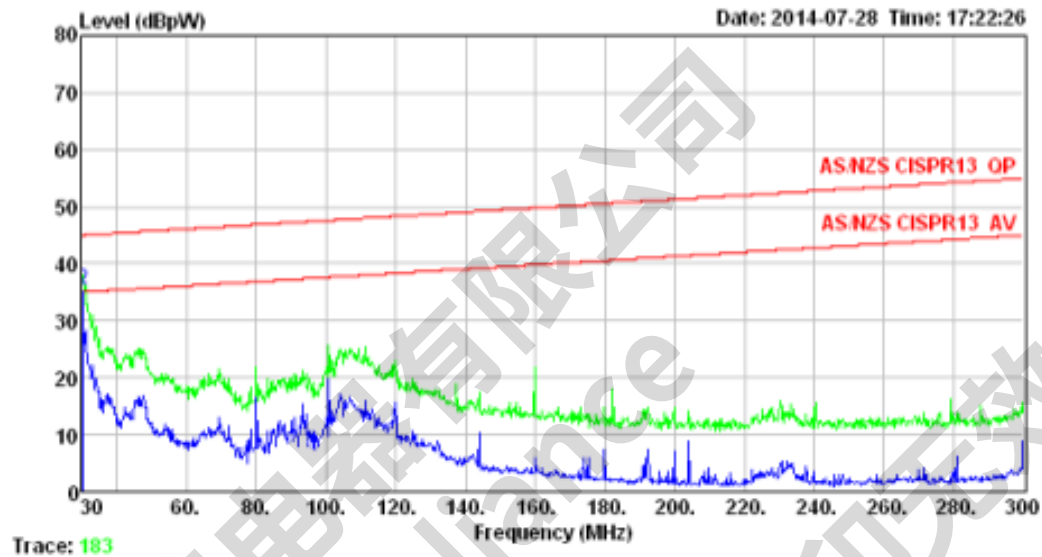

	Freq. (MHz)	Clamp Factor (dB)	Cable Loss (dB)	Reading (dBpW)	Emission Level (dBpW)	Limit (dBpW)	Margin (dB)	Remark
1	30.27	20.83	6.74	1.21	28.78	35.01	6.23	Average
2	30.27	20.83	6.74	7.93	35.50	45.00	9.50	QP

Power Disturbance Test 30MHz – 300MHz

EUT : M/N: FJ-SW7262400500DS(with common mode choke LF1 and MOV1)
 Operation Condition : Full Load
 Test Specification : DC Line
 Comment : AC 240V/50Hz

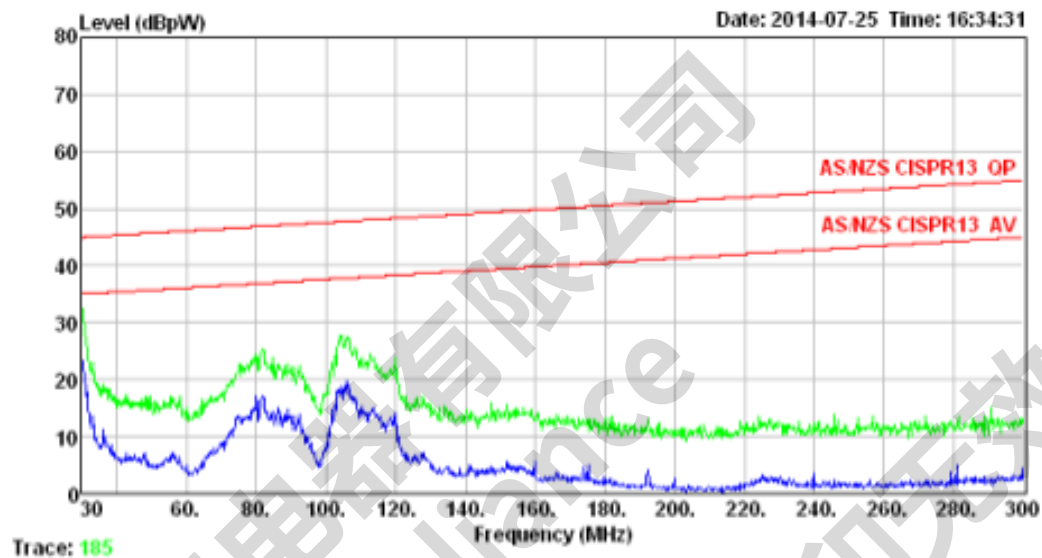

Freq. (MHz)	Clamp Factor (dB)	Cable Loss (dB)	Reading (dBpW)	Emission Level (dBpW)	Limit (dBpW)	Margin (dB)	Remark



Product Service

Test Equipment List

Power Disturbance Test

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESVD	826152	2015-03-17
Absorbing Clamp	Liithi	MDS-21	809002	2015-03-21
Clamp Attenuation	Rohde & Schwarz	MDS-21	100352	2014-08-25

10 Appendix A – Product Information Form(s)

Model list:

Model number	Output voltage range (Vdc)	Output current range(Ma)	Max. output power (W)
FJ-SWqxxxxyyyzn (xxx=050-085, yyyy=0100-2500)	5.0-8.5	100-2500	12.5
FJ-SWqxxxxyyyzn (xxx=090-155, yyyy=0100-1300)	9.0-15.5	100-1300	12.0
FJ-SWqxxxxyyyzn (xxx=160-240, yyyy=0100-0750)	16.0-24.0	100-750	12.0

- “q”=126 or 726, “126” means type A PCB and horizontal enclosure used, “726” means type B PCB and vertical enclosure used(only provided with fixed plug)
- “xxx”=050-240, “xxx” are 3digits indicating 10 times the output voltage value in V, For example, 050 represents the output voltage is 5.0Vdc.
- “yyy”=0100-2500, “yyy” are 4 digits indicating 1000 times the output current value in A. For example, 0100 represents the output current is 0.1A.
- “z”=U or D, “U” indicating output with USB connector, “D” indicating output with output cable
- n”= S, N, S means fixed Australia plug provided, N means detachable plug provided.
- All models for series FJ-SW126xxxxyyyzn and series FJ-SW726xxxxyyyzn have same schematic and PCB layout respectively except for rating and enclosure with different plugs provided
- The primary filter could be provided with either common mode choke LF1 or line filter L2.
- For optional components MOV1, R8, R21, CY1, L1, C7, ZD1 and LF1

model Components	From FJ-SWqxxxxyyyzn (xxx=050-085)	From FJ-SWqxxxxyyyzn (xxx=090-155)	From FJ-SWqxxxxyyyzn (xxx=160-240)
R5,R6	1.5Ω-10Ω	1.0Ω-7.5Ω	2.0Ω-15Ω
R15	3.9KΩ-24KΩ	4.7KΩ- 75KΩ	6.8KΩ-82KΩ
R16	2.4KΩ-10KΩ	3.0KΩ-10KΩ	3.3KΩ-10KΩ
C8	Min.330μF, 6.3V -16V	Min.220μF, 16V -25V	Min.100μF, 25V -35V
C9, C12	Min.220μF, 6.3V -16V	Min.100μF, 16V -25V	Min.47μF, 25V -35V
Diodes (D4)	2A -20A, 40V-100V	2A -10A, 60V-150V	1A -5A, 100V-200V

(2)

Model Components	For Model with output ≤6W	For Model with output >6W
C1	2.2μF- 10μF, Min.400V	3.3μF-10μF, Min.400V
C2	4.7μF-15μF, Min.400V	6.8μF-15μF, Min.400V

11 Appendix B – Photographs of EUT



General view for model FJ-SW126xxxxyyyDS



General view for model FJ-SW126xxxxyyyDN(with Australia plug)

Appendix B



General view for model FJ-SW126xxxxyyyDN(with Australia plug)



General view for model FJ-SW726xxxxyyyDS

Appendix B



General view for model FJ-SW726xxxxyyyDS



General view for model FJ-SW726xxxxyyyUS

Appendix B



General view for model FJ-SW726xxxxxxxUS



General view for model FJ-SW126xxxxxxxUS

Appendix B



General view for model FJ-SW126xxxxyyyUS



General view for model FJ-SW126xxxxyyyUN(with Australia plug)

Appendix B




General view for model FJ-SW126xxxxyyyUN(with Australia plug)




PCB view for FJ-SW1260502500DS(with common mode choke LF1 and MOV1)

Appendix B

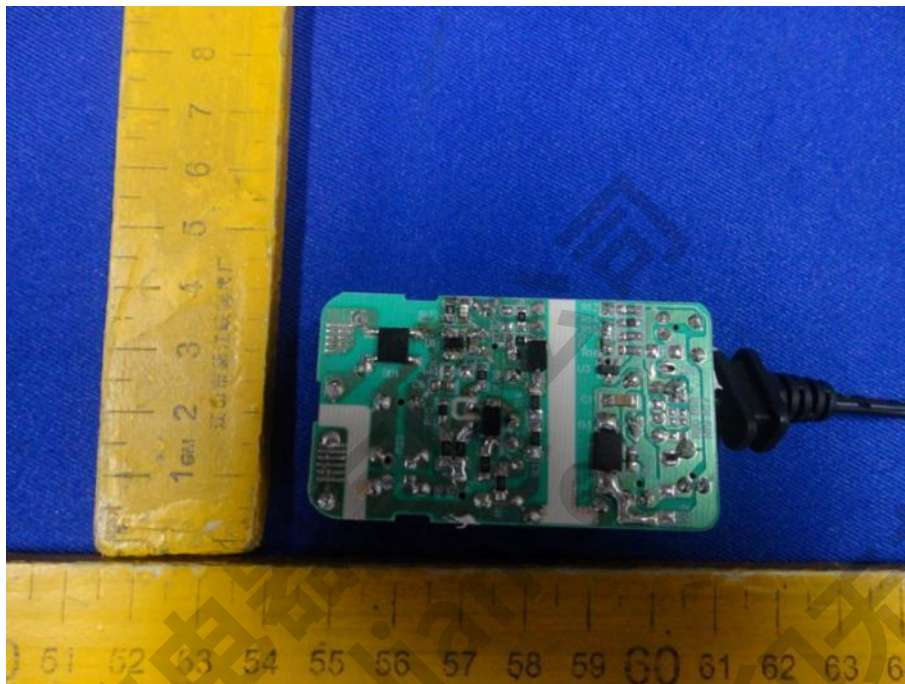


PCB view for FJ-SW1260502500DS(with common mode choke LF1 and MOV1)

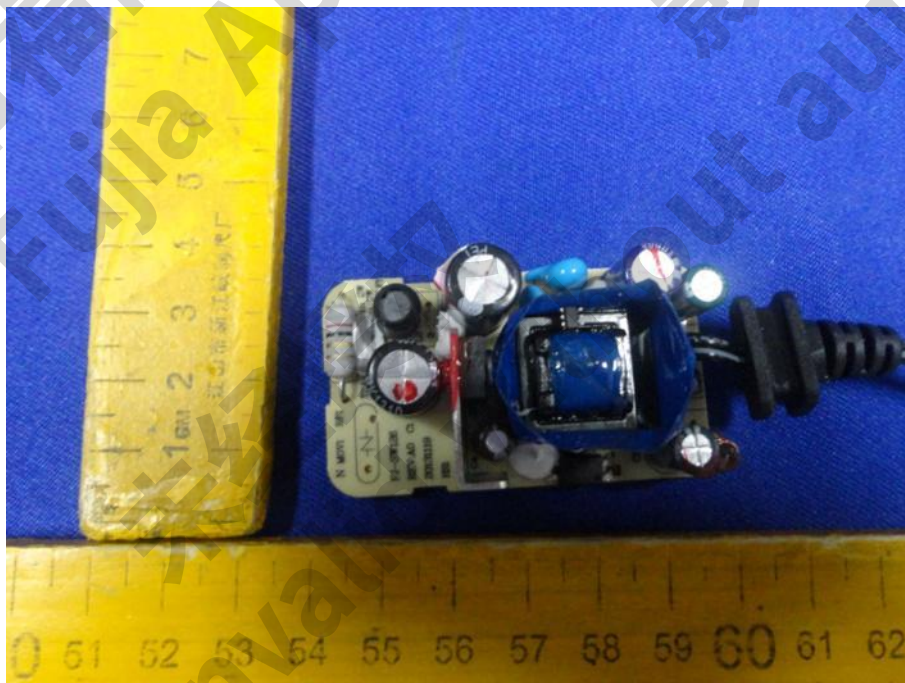


PCB view for FJ-SW1260502500DS(with line filter L1)

Appendix B

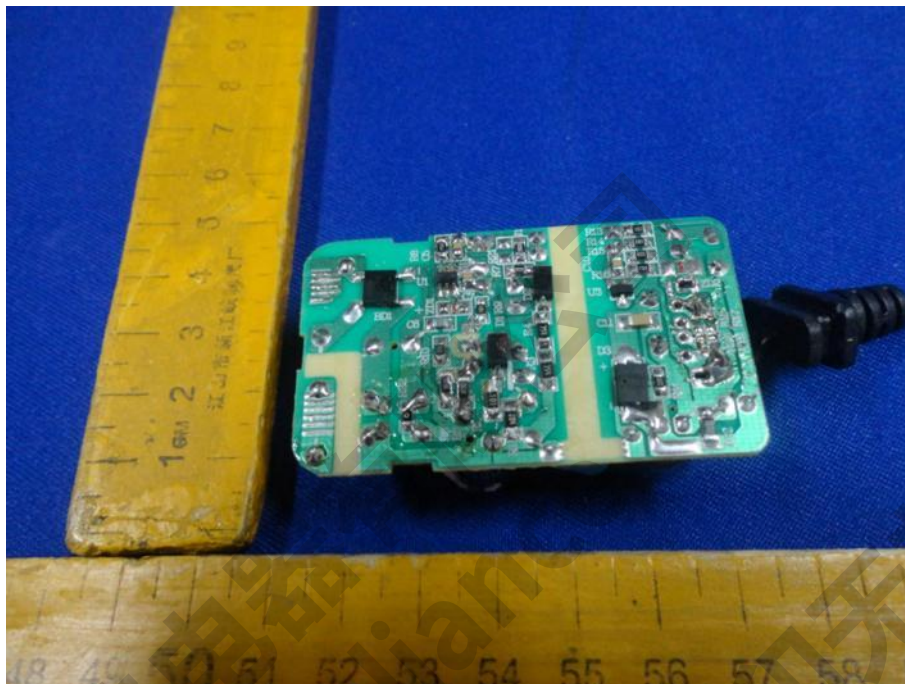


PCB view for FJ-SW1260502500DS(with line filter L1)

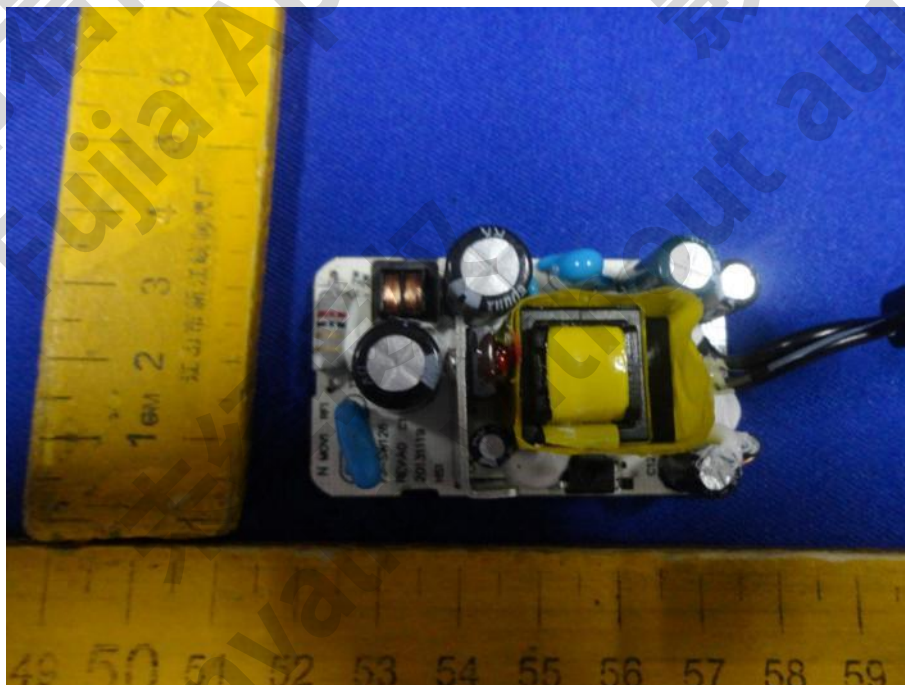


PCB view for FJ-SW1262400500DS(with common mode choke LF1 and MOV1)

Appendix B

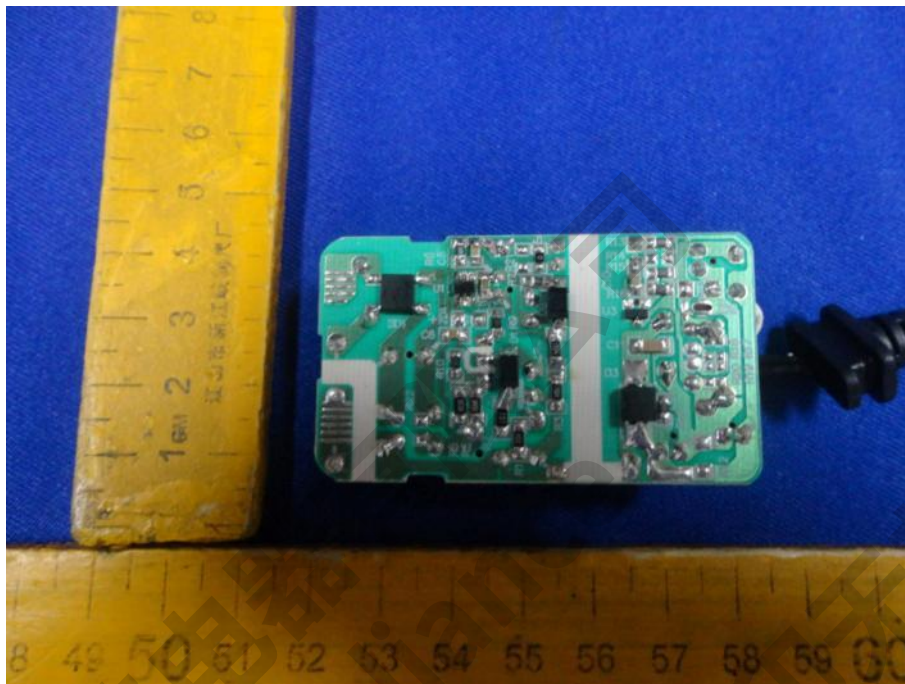


PCB view for FJ-SW1262400500DS(with common mode choke LF1 and MOV1)

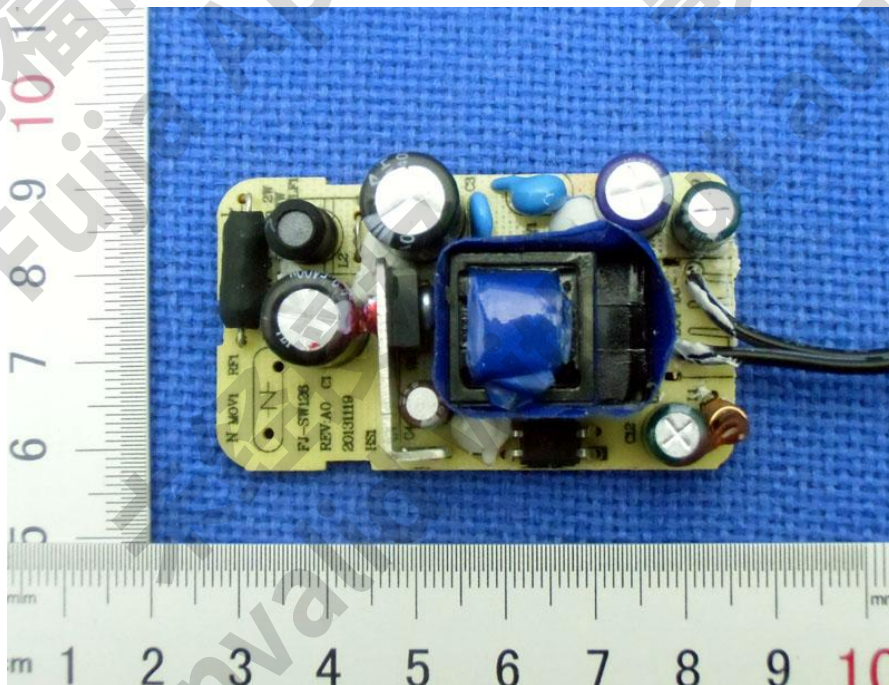

PCB view for FJ-SW1262400500DS(with line filter L1)

Appendix B

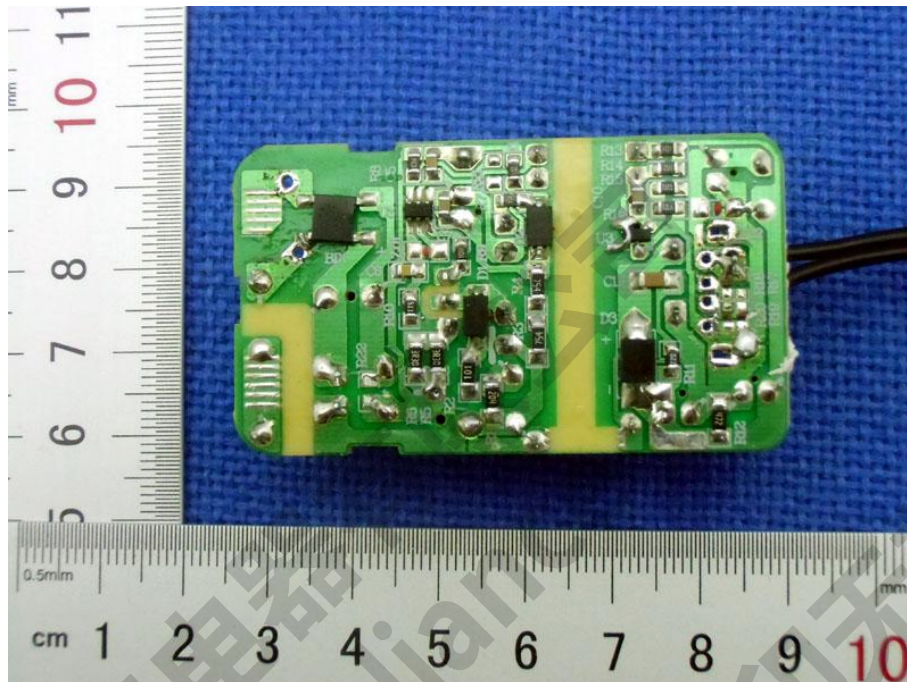


PCB view for FJ-SW1262400500DS(with line filter L1)



PCB view for FJ-SW7260502500DS(with common mode choke LF1 and MOV1)

Appendix B

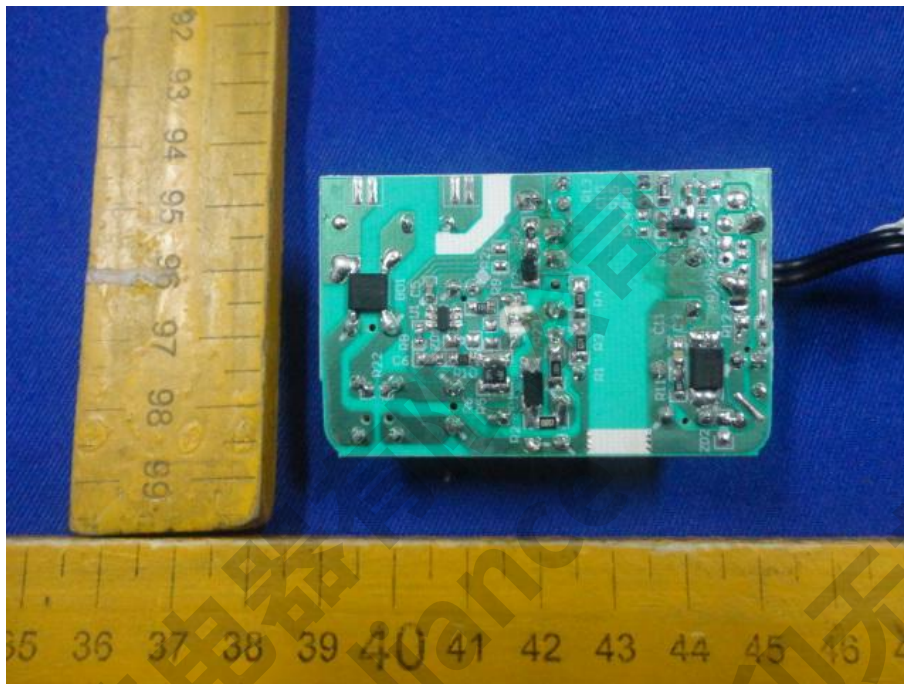


PCB view for FJ-SW7260502500DS(with common mode choke LF1 and MOV1)



PCB view for FJ-SW7260502500DS(with line filter L1)

Appendix B

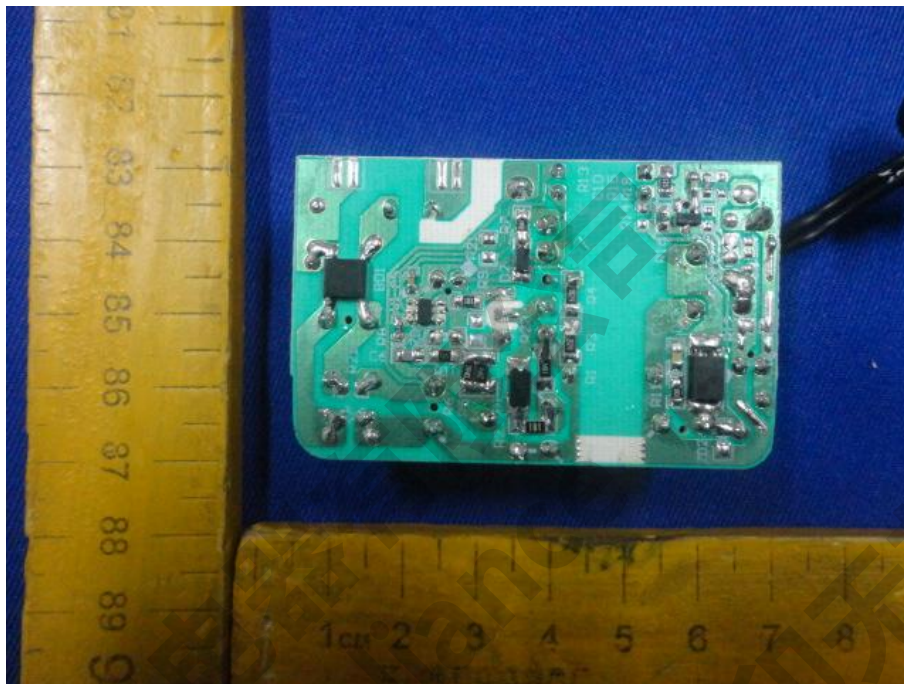


PCB view for FJ-SW7260502500DS(with line filter L1)



PCB view for FJ-SW7262400500DS(with common mode choke LF1 and MOV1)

Appendix B

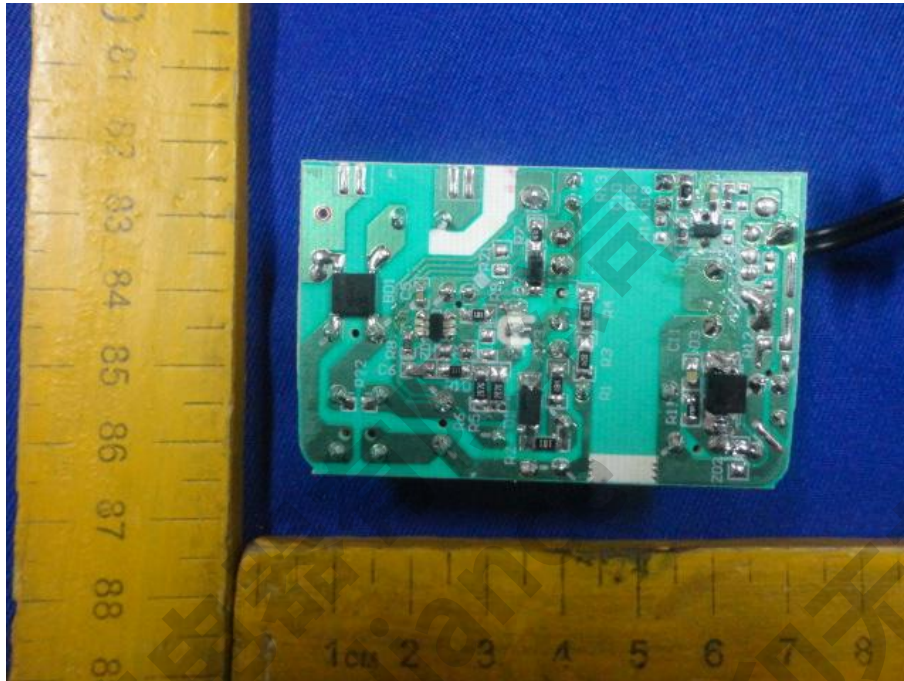


PCB view for FJ-SW7262400500DS(with common mode choke LF1 and MOV1)



PCB view for FJ-SW7262400500DS(with line filter L1)

Appendix B

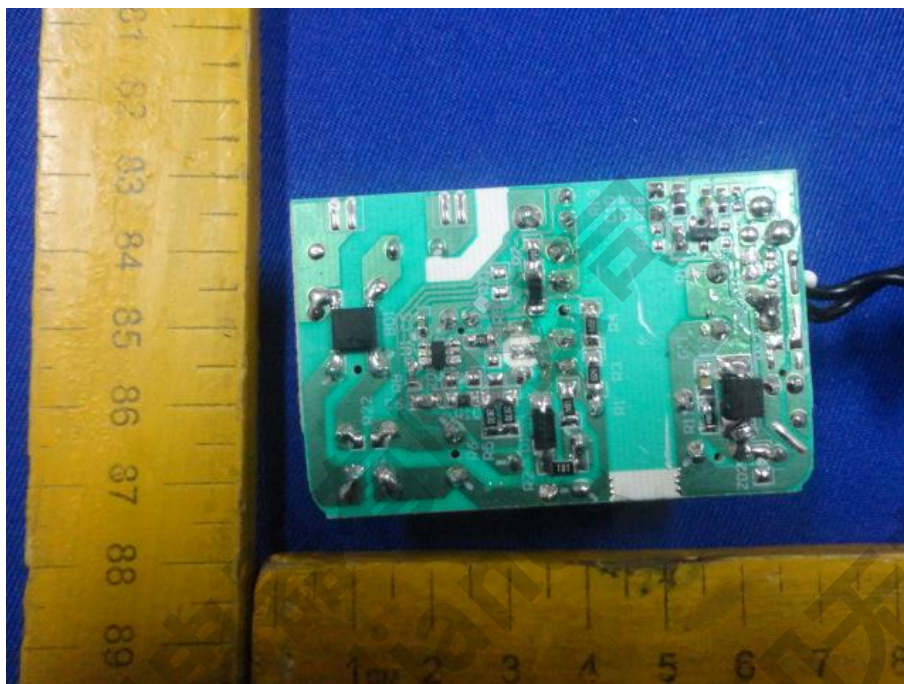

PCB view for FJ-SW7262400500DS(with line filter L1)