

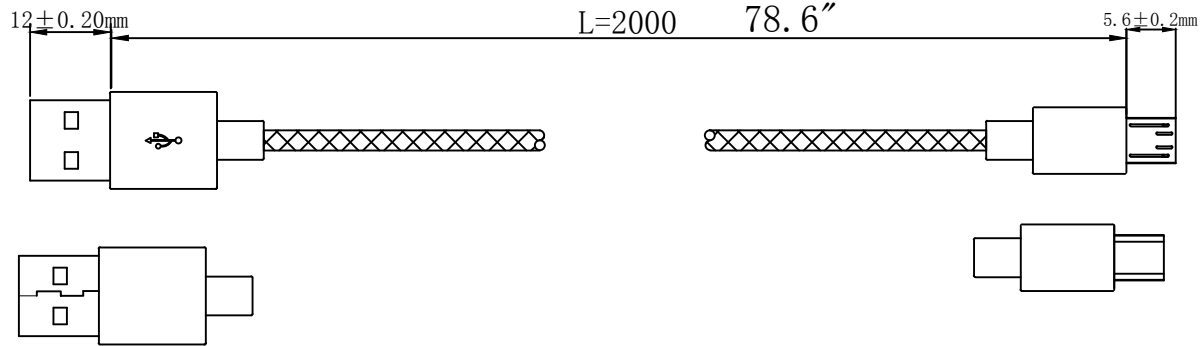


28AWG (7/0.12TC\*0.8PE) \*1P+20AWG45/0.12TC+200 Aramid\*1.3HDPE) \*1C+400D Aramid+AL+SP45/0.12TC OD3.4  
 Black PVC Black+White Braiding OD: 3.8MM

P1




P2




PIN Assignment:

(P1) :	4	3	2	1
(P2) :	5	3	2	1

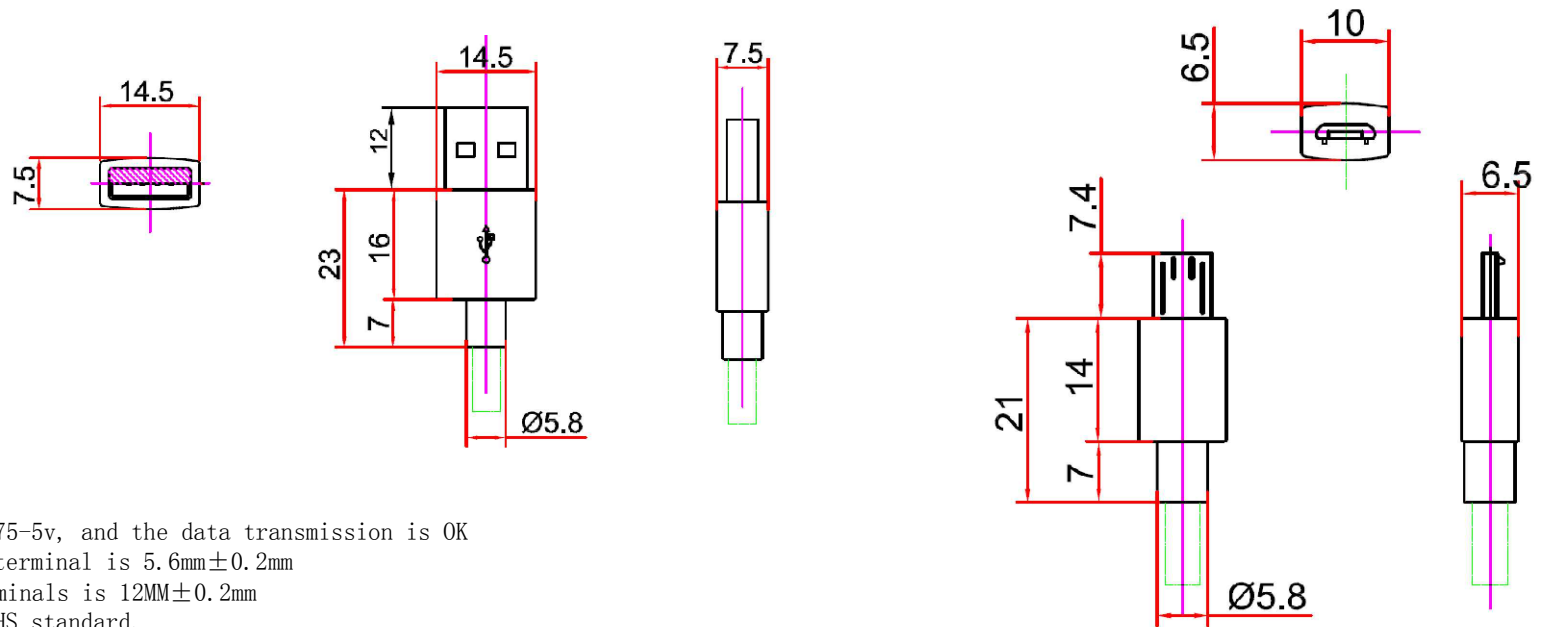

Remark:

1. 100% on-off test
2. Test 2A current through 4.75-5v, and the data transmission is OK
3. The exposed size of Micro terminal is 5.6mm±0.2mm
4. The exposed size of 4 USB terminals is 12MM±0.2mm
5. The product conforms to RoHS standard.

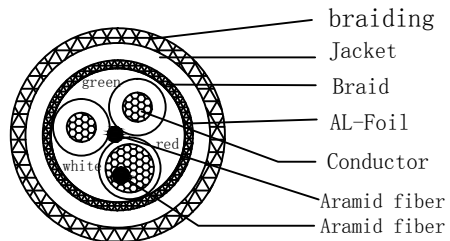

Length tolerance	Autograph	Date		
1.5m < L ≤ 5m ±30mm	Drafting: CJJ	2019.01.19		
	Check:			
	Approval:		Drawing number	USB.2AMA.198
		Revision reason	Customer number	
			Edition	A0