


Wall Mount for displays with mounting points up to 800 x 400mm apart
 Pop-out style for fast access and adjustment
 Fine tilt, rotation, depth, and height adjustment
 Displays 45-80"

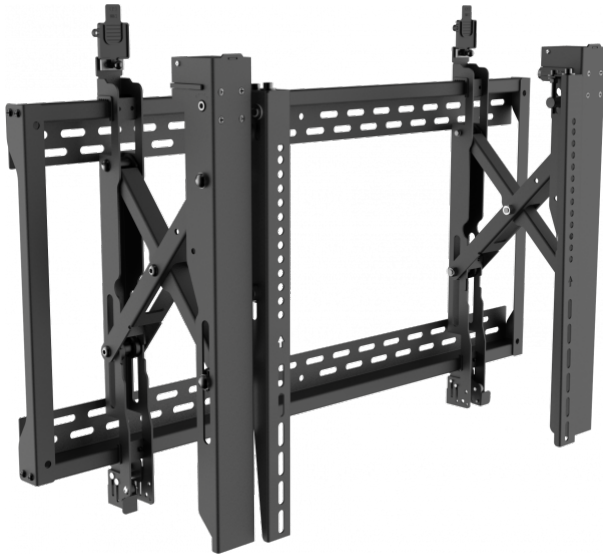

Aligning displays on a video wall is painstaking, so every detail has been thought about on this mount to ensure it is as fast as possible to install, and as easy as possible to adjust with precision.

Minimal Tools

Wherever possible Vision uses thumbscrews which dramatically speed up installation and help with faster adjustment.

Display Fixing Screws

Vision include more screw sizes than other manufacturers to ensure you get that display on the wall as quickly as possible every time.

Pop-out

A light push on the display releases the scissor pop-out mechanism, pushing the display out towards you. Plastic tongues are included which are put into place once you are done to avoid accidental pop-outs.

Quick-Release

Fix the vertical arms to the rear of the display, then lower this assembly onto the wall bracket. It will latch into place. It can be removed by pushing a quick release lever.

Tilt

Adjust tilt by -2 to 4° with screws positioned at the top of the vertical display arms.

Rotation and Height

Adjust rotation by -3 to 3° with screws, also positioned at the top of the display arms.

Depth adjustment

The depth of each side can be adjusted independently with a hex key on the side of the vertical display arms.

45-80" displays

Fits any flat-panel LCD or LED screen which has rear mounting holes up to 800 wide x 400mm tall apart.

Depth

The minimum depth in place is 95 mm (3.7"), and when it pops out it comes 285 mm (11.2").

Lockable

It latches into place and can be locked with a padlock (not included) for further security.

SPECIFICATIONS

PRODUCT DIMENSIONS

870 x 524 x 95-285 mm / 34.3" x 20.6" x 3.7-11.2" (height x width x depth)

PACKAGED DIMENSIONS

947 x 271 x 138 mm / 37.28" x 10.67" x 5.43"

PRODUCT WEIGHT

11.08 kg (24.43 lbs)

PACKAGED WEIGHT

12.42 kg (27.38 lbs)

SAFE WORKING LOAD

70 kg (154 lbs)

CONSTRUCTION MATERIAL

Steel (3.0 mm hot rolled plate; 2.5 mm hot rolled plate; 2.0 mm cold rolled plate)

COLOUR

Black

VESA SIZES

800 x 400 mm 600 x 400 mm 500 x 400 mm 400 x 400 mm 400 x 300 mm 400 x 200 mm 300 x 400 mm 300 x 300 mm 200 x 400 mm 200 x 200 mm

ACCESSORIES INCLUDED

4 x M5 14 mm (0.55") screw 4 x M5 25 mm (1") screw 4 x M6 14 mm (0.55") screw 4 x M6 30 mm (1.2") screw 4 x M8 20 mm (1") screw 4 x M8 30 mm (1.2") screw

WARRANTY

Lifetime return-to-base

COMPLIANCES

RoHS, REACH, UL

